



## ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025

Towntune Asymmetric DR BDP266

Signify N.V.



**EPD HUB, HUB-4982**

Published on 22.01.2026, last updated on 22.01.2026, valid until 22.01.2031

## MANUFACTURER AND SITE

Manufacturer	Signify N.V.
Address	High Tech Campus 48, 5656 AE Eindhoven, The Netherlands
Contact details	sustainability@signify.com
Website	https://www.signify.com/global
Place of production	VALLADOLID, SPAIN
Place(s) of raw material origin	EU, APAC
Place(s) of installation and use	EU
Period for data	Calendar Year 2023

## EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804:2012+A2:2019/AC:2021 and ISO 14025
PCR	EPD Hub Core PCR version 1.2, 24 Mar 2025
Sector	Electrical product
Category of EPD	Third party verified EPD
Scope of the EPD	Cradle to gate with options, A4-A5, B6, and modules C1-C4, D
EPD author	Signify / Sustainability
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal verification <input checked="" type="checkbox"/> External verification
EPD verifier	Imane Uald Lamkaddam as an authorized verifier for EPD Hub

## PRODUCT SPECIFICATION

Product name	Towntune Asymmetric DR BDP266
Product number / reference	912300024198 / BDP266 LED50-4S/740 DS50 DDF2 76A
GTIN (Global Trade Item Number)	Not applicable
NOBB (Norwegian Building Product Database)	Not applicable
A1-A3 Specific data (%)	4.36

## PRODUCT DESCRIPTION

Designed to enhance existing and scalable urban spaces, the TownTune family offers all the latest lighting innovations in terms of performance, quality of light and connectivity. The family consists of four solutions: a Central Post Top (CPT), an Asymmetric Spigot Post Top / Side Entry version (ASY), a version with an extending Lyre post top bracket (Lyre), and a Central Post Top with a Conical Comfort Bowl (CCB). Each TownTune luminaire can be customized with a choice of different shapes on top of the housing, plus there's the option to add a decorative ring, which comes in two colors (excluding CCB). Design options that enable you to create your very own lighting signature and bring a distinctive identity to districts and cities. In addition, every luminaire in the TownTune family is uniquely identifiable, thanks to the Signify Service tag app. By simply scanning a QR code, placed inside the door of the mast or directly on the luminaire, you can instantly access the configuration of the luminaire. This makes maintenance and programming operations faster and easier and enables you to create your digital library of lighting assets and spare parts. TownTune also uses the Philips LEDGINE-O lighting platform, ensuring you always have the right amount and direction of light on your street. Furthermore, thanks to being system ready (SR), TownTune is also future proof. A solution that's ready to be paired with both standalone and advanced control and lighting software applications such as Interact City.

This EPD is intended for business-to-business and/or business-to-consumer communication. Life Cycle Assessment study has been performed in accordance with the requirements of EN 15804, EPD Hub PCR version 1.2 (24 Mar 2025) and JRC characterization factors EF 3.1. The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

### PRODUCT CLASSIFICATION

Declared operating voltage, Volt	240
Light source colour temperature, Kelvin	4000
Protection index for water and dust (IP)	66
Impact resistance index (IK)	10
Luminous flux, Lumens	4050
Electrical power, Watt	28.5
Luminous efficiency, Lm/W	142
Additional characteristic	Not applicable

### ABOUT THE MANUFACTURER

Signify is the world leader in lighting for professionals, consumers and lighting for the Internet of Things. Our energy efficient lighting products, systems and services enable our customers to enjoy a superior quality of light, and make people's lives safer and more comfortable, businesses more productive and cities more liveable.

For more information, please visit: <https://www.signify.com/global>

### PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	67.76	EU , APAC
Minerals	0	EU
Fossil materials	32.24	EU , APAC
Bio-based materials	0	EU

### BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0.432

### ENVIRONMENTAL DATA SUMMARY

Declared unit	1 unit
Declared unit mass, kg	7.341
Mass of packaging, kg	1.091
Functional unit (from PEP PSR0014)	Provide lighting that delivers an outgoing artificial luminous flux of 1000 lumens during a reference lifetime of 35000 hours
Reference service life (years)	25
Assigned lifetime (hours)	100000
GWP-total, A1-A3 (kg CO <sub>2</sub> e)	70.5
GWP-fossil, A1-A3 (kg CO <sub>2</sub> e)	71.5
Secondary material, inputs (%)	47.7
Secondary material, outputs (%)	47.4
Total energy use, A1-A3 (kWh)	260
Net freshwater use, A1-A3 (m <sup>3</sup> )	3.70E-01

# LIFE CYCLE ASSESSMENT

## SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Installation stage		Use stage							End of life stage				Beyond the system
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	ND	ND	ND	ND	ND	X	ND	X	X	X	X	X
Raw materials	Transport	Manufacturing	Transport	Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demo.	Transport	Waste processing	Disposal	Reuse, Recovery, Recycling

Modules not declared = ND.

## CUT - OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. There is no neglected unit process more than 1% of total mass or energy flows. The module-specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

The production of capital equipment, construction activities, and infrastructure, maintenance and operation of capital equipment, personnel-related activities, energy and water use related to company management and sales activities are excluded.

## VALIDATION OF DATA

Data collection for production, transport, and packaging was conducted using time and site-specific information, as defined in the general information section on page 1 and 2. Upstream process calculations rely on generic data as defined in the Bibliography section. Manufacturer-provided specific and generic data were used for the product’s manufacturing stage. The analysis was performed in One Click LCA EPD Generator, with the 'Cut-Off, EN 15804+A2' allocation method, and characterization factors according to EN 15804:2012+A2:2019/AC:2021 and JRC EF 3.1.

## ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass
Manufacturing energy and waste	Allocated by mass

Proxy data is used for certain materials due to their unavailability in the database. Conservative choices have been adopted when exact information was missing. Regarding module C1-C4: EOL scenarios are based on default values from EN 50693. For stages description please refer to section Product life cycle in this EPD report.

### LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA Luminaire EPD Generator v2.2.7. The LCA and EPD have been prepared according to the reference standards, EN 50693, and ISO 14040/14044. Ecoinvent v 3.10.1 and One Click LCA databases were used as sources of environmental data. Allocation used in Ecoinvent 3.10.1 environmental data sources follow the methodology 'allocation, cut-off, EN 15804+A2'.

No other sources were used in the modelling of this EPD.

### PRODUCT & MANUFACTURING SITES GROUPING

---

Type of grouping	No grouping
Grouping method	Not applicable
Variation in GWP-fossil for A1-A3, %	Not applicable

---

### SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

## PRODUCT LIFE CYCLE

### MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production. The material losses occurring during the manufacturing processes are treated as per the waste handling practices in the factory, while scenario assumptions are made in the absence of exact data. The study also considers the fuels used by machines as well as losses during electricity transmission.

The product is made of metals, plastics, and electronic components. All components are transported to the production facility, where the main manufacturing processes primarily are associated with assembly. A2 transport distances are calculated always taking the capital city of component country of origin as a starting point and exact manufacturing location as destination. The finished product can be packaged with polyethylene, cardboard, and/or paper as packaging material before shipment to customers. Manufacturing loss, ancillaries and wastes are calculated according to the data that each manufacturing site is sharing with Signify. The total annual amount of waste in kg is allocated to the total annual production in kg at the specific manufacturing site responsible to produce the studied product. Thus, it is possible to allocate it according to the weight of the product analysed in this study.

Co-product allocation is neglected as revenue of co-product is very low, hence, the waste undergoes a conservative waste treatment.

The use of green energy in manufacturing is demonstrated through contractual instruments (GOs, RECs, etc), and its use is ensured throughout the validity period of this EPD.

### TRANSPORT AND INSTALLATION (A4-A5)

A4 transport distances are calculated always taking the exact manufacturing location to customer location. If the customer's location is defined as a country or its capital city, the calculation is made to the respective capital city. If the

customer's location is specified as a region, the distance is calculated to the capital city of the best-performing sales country within that region. The transportation method is a combination of lorry and container ship where needed. To be conservative, empty returns are included in this study as implemented through an average load factor in the Ecoinvent transport datapoints. Environmental impacts from installation include waste packaging materials (A5). The packaging waste treatment is assumed to be conservative with incineration without energy recovery. The impacts of energy consumption and the used ancillary materials during installation are considered negligible.

### PRODUCT USE AND MAINTENANCE (B1-B7)


During the use phase, the product consumes electricity (B6), which is calculated multiplying the Wattage x Assigned lifetime (hours) x Country energy mix factor. To know which Country energy mix was used in this EPD, please refer to Annex 2.

The Reference service life in years is calculated according to the main application type of the product, based on annual operating hours. Impacts due to electricity production include direct emissions to air, transformation, and transmission losses.

### PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. The transport distance is 150 km while the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

# LIFE CYCLE FLOW DIAGRAM - SYSTEM BOUNDARY

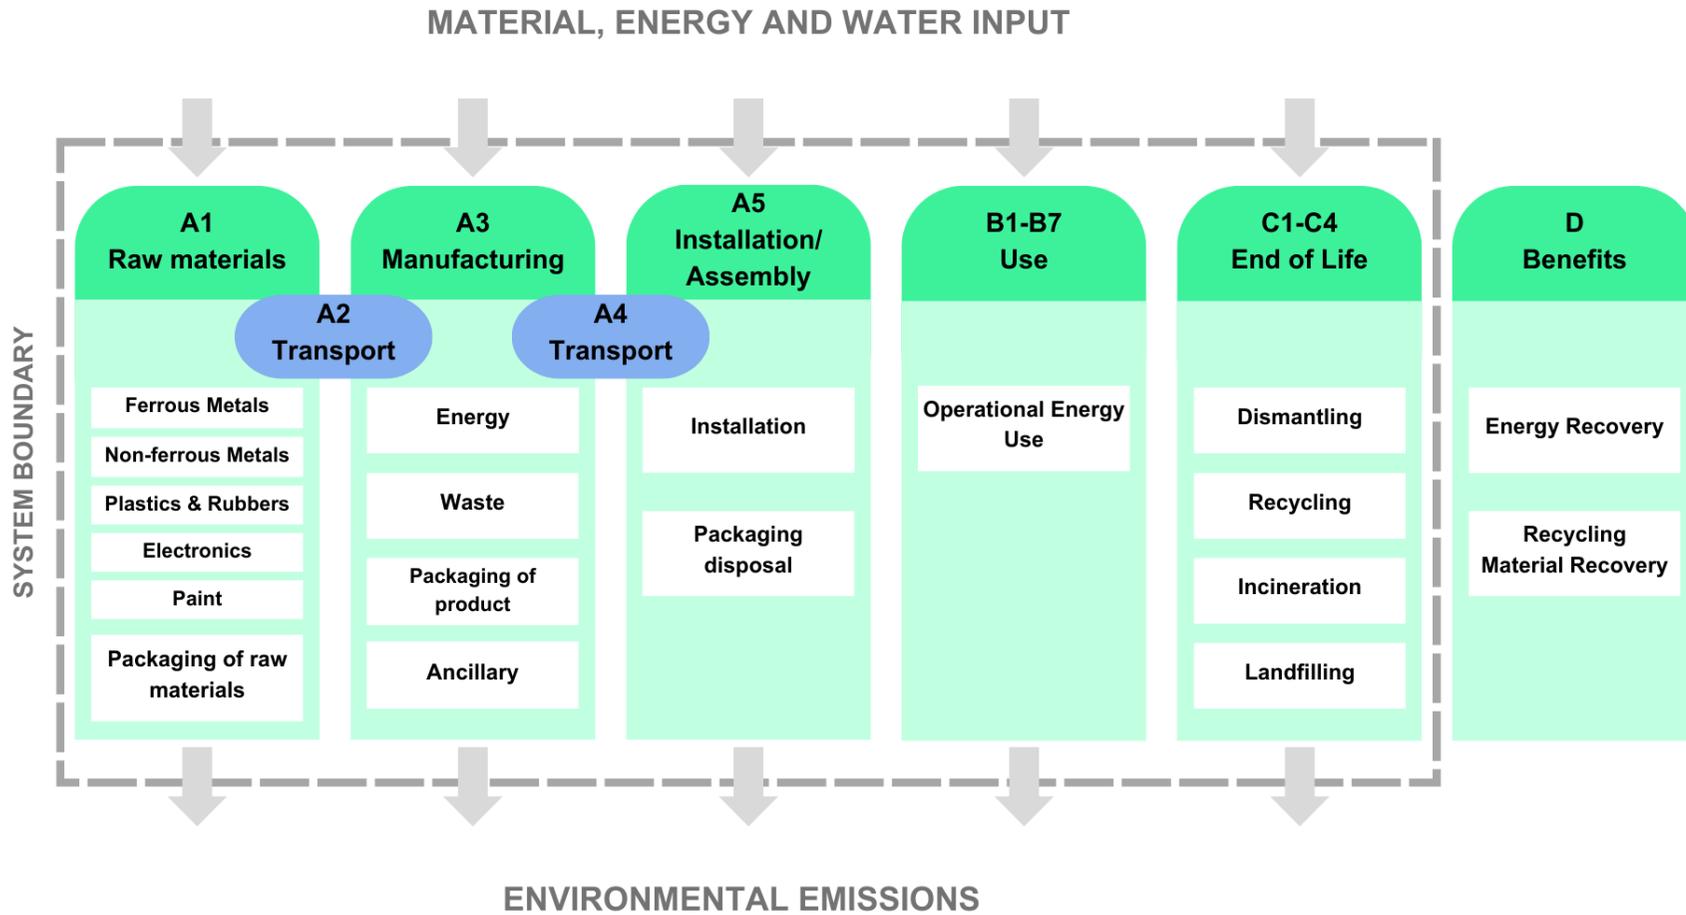

# ENVIRONMENTAL IMPACT DATA, RESULTS PER DECLARED UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

## CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total <sup>1)</sup>	kg CO <sub>2</sub> e	6.86E+01	7.63E-01	1.09E+00	7.05E+01	2.51E+00	1.65E+00	ND	ND	ND	ND	ND	9.38E+02	ND	0.00E+00	2.15E-01	2.31E+00	1.12E+00	-3.89E+00
GWP – fossil	kg CO <sub>2</sub> e	6.83E+01	7.63E-01	2.41E+00	7.15E+01	2.50E+00	7.19E-02	ND	ND	ND	ND	ND	9.33E+02	ND	0.00E+00	2.15E-01	2.31E+00	1.20E+00	-3.88E+00
GWP – biogenic	kg CO <sub>2</sub> e	1.59E-01	1.72E-04	-1.36E+00	-1.20E+00	5.67E-04	1.58E+00	ND	ND	ND	ND	ND	2.09E+00	ND	0.00E+00	4.70E-05	-3.12E-04	-8.03E-02	-5.22E-03
GWP – LULUC	kg CO <sub>2</sub> e	1.00E-01	3.43E-04	3.60E-02	1.37E-01	1.12E-03	2.52E-05	ND	ND	ND	ND	ND	2.86E+00	ND	0.00E+00	9.53E-05	1.87E-04	7.89E-05	-6.48E-03
Ozone depletion pot.	kg CFC-11e	9.72E-07	1.13E-08	5.70E-08	1.04E-06	3.70E-08	9.41E-10	ND	ND	ND	ND	ND	1.72E-05	ND	0.00E+00	3.01E-09	2.03E-09	1.37E-09	-2.27E-08
Acidification potential	mol H <sup>+</sup> e	4.55E-01	2.96E-03	9.73E-03	4.68E-01	8.54E-03	4.07E-04	ND	ND	ND	ND	ND	5.48E+00	ND	0.00E+00	7.17E-04	1.67E-03	5.96E-04	-5.29E-02
EP-freshwater <sup>2)</sup>	kg Pe	3.06E-02	5.87E-05	8.21E-04	3.15E-02	1.95E-04	6.88E-06	ND	ND	ND	ND	ND	8.68E-01	ND	0.00E+00	1.67E-05	7.17E-05	2.36E-05	-3.26E-03
EP-marine	kg Ne	7.25E-02	9.41E-04	4.14E-03	7.75E-02	2.81E-03	1.90E-04	ND	ND	ND	ND	ND	8.60E-01	ND	0.00E+00	2.32E-04	5.37E-04	1.85E-03	-4.80E-03
EP-terrestrial	mol Ne	7.47E-01	1.03E-02	2.67E-02	7.84E-01	3.05E-02	1.73E-03	ND	ND	ND	ND	ND	7.71E+00	ND	0.00E+00	2.53E-03	5.26E-03	2.63E-03	-5.42E-02
POCP (“smog”) <sup>3)</sup>	kg NMVOCe	2.72E-01	4.07E-03	1.07E-02	2.87E-01	1.26E-02	4.93E-04	ND	ND	ND	ND	ND	2.54E+00	ND	0.00E+00	9.98E-04	1.44E-03	7.89E-04	-1.61E-02
ADP-minerals & metals <sup>4)</sup>	kg Sbe	2.89E-03	2.10E-06	1.29E-05	2.90E-03	6.99E-06	2.04E-07	ND	ND	ND	ND	ND	1.26E-02	ND	0.00E+00	7.06E-07	5.96E-06	2.09E-07	-5.38E-04
ADP-fossil resources	MJ	8.82E+02	1.10E+01	3.23E+01	9.26E+02	3.64E+01	7.08E-01	ND	ND	ND	ND	ND	2.17E+04	ND	0.00E+00	3.02E+00	1.93E+00	1.09E+00	-4.67E+01
Water use <sup>5)</sup>	m <sup>3</sup> e depr.	1.96E+01	5.42E-02	9.11E-01	2.06E+01	1.80E-01	8.20E-02	ND	ND	ND	ND	ND	5.92E+02	ND	0.00E+00	1.40E-02	1.69E-01	8.41E-02	-9.52E-01

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

**ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1**

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	4.75E-06	7.54E-08	1.69E-07	5.00E-06	2.51E-07	5.07E-09	ND	ND	ND	ND	ND	1.96E-05	ND	0.00E+00	1.71E-08	1.81E-08	7.95E-09	-2.85E-07
Ionizing radiation <sup>6)</sup>	kBq U235e	3.80E+00	9.54E-03	1.01E-01	3.91E+00	3.17E-02	8.58E-04	ND	ND	ND	ND	ND	6.00E+02	ND	0.00E+00	2.44E-03	8.75E-03	1.68E-03	-4.32E-01
Ecotoxicity (freshwater)	CTUe	9.57E+02	1.55E+00	1.08E+01	9.69E+02	5.14E+00	1.96E+00	ND	ND	ND	ND	ND	3.31E+03	ND	0.00E+00	4.77E-01	5.04E+00	1.33E+02	-3.72E+01
Human toxicity, cancer	CTUh	5.85E-08	1.27E-10	1.10E-09	5.97E-08	4.13E-10	9.45E-11	ND	ND	ND	ND	ND	3.15E-07	ND	0.00E+00	3.66E-11	2.72E-10	1.51E-10	-5.04E-09
Human tox. non-cancer	CTUh	1.68E-06	7.08E-09	2.96E-08	1.72E-06	2.35E-08	3.86E-09	ND	ND	ND	ND	ND	1.63E-05	ND	0.00E+00	1.89E-09	1.23E-08	9.51E-09	-4.94E-07
SQP <sup>7)</sup>	-	2.56E+02	1.10E+01	1.10E+02	3.77E+02	3.66E+01	3.46E-01	ND	ND	ND	ND	ND	4.83E+03	ND	0.00E+00	1.80E+00	2.34E+00	1.44E+00	-2.17E+01

**USE OF NATURAL RESOURCES**

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy <sup>8)</sup>	MJ	7.70E+01	1.50E-01	8.82E+00	8.60E+01	4.98E-01	-1.94E+01	ND	ND	ND	ND	ND	5.96E+03	ND	0.00E+00	4.14E-02	2.46E-01	-1.46E+00	-6.54E+00
Renew. PER as material	MJ	2.19E+00	0.00E+00	1.18E+01	1.40E+01	0.00E+00	-1.40E+01	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-7.67E-03	-1.42E-02	0.00E+00
Total use of renew. PER	MJ	7.92E+01	1.50E-01	2.06E+01	1.00E+02	4.98E-01	-3.33E+01	ND	ND	ND	ND	ND	5.96E+03	ND	0.00E+00	4.14E-02	2.38E-01	-1.47E+00	-6.54E+00
Non-re. PER as energy	MJ	8.15E+02	1.10E+01	2.54E+01	8.51E+02	3.64E+01	6.53E-01	ND	ND	ND	ND	ND	2.17E+04	ND	0.00E+00	3.02E+00	-3.15E+01	-4.03E+01	-4.68E+01
Non-re. PER as material	MJ	6.39E+01	0.00E+00	-1.49E+00	6.24E+01	0.00E+00	-1.89E-01	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-3.00E+01	-3.22E+01	0.00E+00
Total use of non-re. PER	MJ	8.79E+02	1.10E+01	2.39E+01	9.14E+02	3.64E+01	4.64E-01	ND	ND	ND	ND	ND	2.17E+04	ND	0.00E+00	3.02E+00	-6.15E+01	-7.25E+01	-4.68E+01
Secondary materials	kg	3.50E+00	0.00E+00	0.00E+00	3.50E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renew. secondary fuels	MJ	4.11E-02	5.89E-05	1.15E-01	1.56E-01	1.97E-04	8.82E-06	ND	ND	ND	ND	ND	2.87E-02	ND	0.00E+00	1.73E-05	8.85E-05	1.67E-05	-5.82E-04
Non-ren. secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m <sup>3</sup>	3.48E-01	1.62E-03	2.07E-02	3.70E-01	5.37E-03	1.33E-03	ND	ND	ND	ND	ND	1.88E+01	ND	0.00E+00	4.00E-04	3.16E-03	-4.29E-03	-3.33E-02

8) PER = Primary energy resources.

### END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	1.02E+01	1.86E-02	1.30E-01	1.04E+01	6.16E-02	2.16E-02	ND	ND	ND	ND	ND	5.49E+01	ND	0.00E+00	5.26E-03	4.91E-02	8.45E-02	-4.60E-01
Non-hazardous waste	kg	2.40E+02	3.44E-01	9.14E+00	2.49E+02	1.14E+00	1.17E+00	ND	ND	ND	ND	ND	4.25E+03	ND	0.00E+00	9.87E-02	1.33E+00	1.00E+01	-1.85E+01
Radioactive waste	kg	9.46E-04	2.34E-06	2.40E-05	9.73E-04	7.75E-06	2.15E-07	ND	ND	ND	ND	ND	1.54E-01	ND	0.00E+00	5.98E-07	2.15E-06	4.15E-07	-1.06E-04

### END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	8.83E-02	8.83E-02	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	3.48E+00	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	1.05E+01	0.00E+00	0.00E+00
Exported energy – Electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	4.41E+00	0.00E+00	0.00E+00
Exported energy – Heat	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	6.06E+00	0.00E+00	0.00E+00

**ENVIRONMENTAL IMPACTS – EN 15804+A1, CML**

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO <sub>2</sub> e	6.83E+01	7.59E-01	2.56E+00	7.16E+01	2.49E+00	7.14E-02	ND	ND	ND	ND	ND	9.33E+02	ND	0.00E+00	2.14E-01	2.31E+00	1.28E+00	-3.86E+00
Ozone depletion Pot.	kg CFC-11e	8.77E-07	8.98E-09	5.63E-08	9.42E-07	2.95E-08	8.00E-10	ND	ND	ND	ND	ND	1.44E-05	ND	0.00E+00	2.40E-09	1.73E-09	1.13E-09	-1.92E-08
Acidification	kg SO <sub>2</sub> e	3.83E-01	2.28E-03	6.93E-03	3.92E-01	6.52E-03	2.99E-04	ND	ND	ND	ND	ND	4.67E+00	ND	0.00E+00	5.49E-04	1.30E-03	4.31E-04	-4.59E-02
Eutrophication	kg PO <sub>4</sub> <sup>3</sup> e	1.16E-01	5.11E-04	4.56E-03	1.21E-01	1.59E-03	9.29E-05	ND	ND	ND	ND	ND	6.05E-01	ND	0.00E+00	1.34E-04	2.60E-04	3.67E-04	-3.02E-03
POCP (“smog”)	kg C <sub>2</sub> H <sub>4</sub> e	3.40E-02	1.90E-04	7.81E-04	3.50E-02	5.81E-04	2.28E-05	ND	ND	ND	ND	ND	2.55E-01	ND	0.00E+00	4.92E-05	7.88E-05	5.98E-05	-2.14E-03
ADP-elements	kg Sbe	2.86E-03	2.05E-06	1.27E-05	2.88E-03	6.82E-06	1.70E-07	ND	ND	ND	ND	ND	1.26E-02	ND	0.00E+00	6.90E-07	5.89E-06	1.80E-07	-5.37E-04
ADP-fossil	MJ	8.19E+02	1.09E+01	3.07E+01	8.61E+02	3.59E+01	6.94E-01	ND	ND	ND	ND	ND	1.11E+04	ND	0.00E+00	2.98E+00	1.79E+00	1.06E+00	-3.99E+01

**ADDITIONAL INDICATOR – GWP-GHG**

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG 9)	kg CO <sub>2</sub> e	6.84E+01	7.63E-01	2.45E+00	7.17E+01	2.51E+00	7.19E-02	ND	ND	ND	ND	ND	9.36E+02	ND	0.00E+00	2.15E-01	2.31E+00	1.20E+00	-3.88E+00

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH<sub>4</sub> fossil, CH<sub>4</sub> biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO<sub>2</sub> is set to zero.

# ENVIRONMENTAL IMPACT DATA, RESULTS PER FUNCTIONAL UNIT

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

## CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total <sup>1)</sup>	kg CO <sub>2</sub> éq/FU	5.93E+00	6.60E-02	9.42E-02	6.09E+00	2.17E-01	1.43E-01	ND	ND	ND	ND	ND	8.10E+01	ND	0.00E+00	1.86E-02	2.00E-01	9.69E-02	-3.36E-01
GWP – fossil	kg CO <sub>2</sub> éq/FU	5.91E+00	6.59E-02	2.08E-01	6.18E+00	2.16E-01	6.21E-03	ND	ND	ND	ND	ND	8.06E+01	ND	0.00E+00	1.86E-02	2.00E-01	1.04E-01	-3.35E-01
GWP – biogenic	kg CO <sub>2</sub> éq/FU	1.37E-02	1.48E-05	-1.17E-01	-1.04E-01	4.90E-05	1.36E-01	ND	ND	ND	ND	ND	1.81E-01	ND	0.00E+00	4.06E-06	-2.69E-05	-6.94E-03	-4.51E-04
GWP – LULUC	kg CO <sub>2</sub> éq/FU	8.68E-03	2.96E-05	3.11E-03	1.18E-02	9.69E-05	2.18E-06	ND	ND	ND	ND	ND	2.47E-01	ND	0.00E+00	8.23E-06	1.62E-05	6.82E-06	-5.60E-04
Ozone depletion pot.	kg CFC <sub>11</sub> e/FU	8.40E-08	9.73E-10	4.92E-09	8.99E-08	3.20E-09	8.13E-11	ND	ND	ND	ND	ND	1.49E-06	ND	0.00E+00	2.60E-10	1.75E-10	1.18E-10	-1.96E-09
Acidification potential	mole H <sup>+</sup> e/FU	3.93E-02	2.56E-04	8.41E-04	4.04E-02	7.38E-04	3.52E-05	ND	ND	ND	ND	ND	4.74E-01	ND	0.00E+00	6.20E-05	1.44E-04	5.15E-05	-4.57E-03
EP-freshwater <sup>2)</sup>	kg Pe/FU	2.65E-03	5.08E-06	7.10E-05	2.72E-03	1.69E-05	5.94E-07	ND	ND	ND	ND	ND	7.50E-02	ND	0.00E+00	1.45E-06	6.20E-06	2.04E-06	-2.82E-04
EP-marine	kg Ne/FU	6.26E-03	8.13E-05	3.57E-04	6.70E-03	2.43E-04	1.64E-05	ND	ND	ND	ND	ND	7.44E-02	ND	0.00E+00	2.01E-05	4.64E-05	1.60E-04	-4.15E-04
EP-terrestrial	mol Ne/FU	6.45E-02	8.87E-04	2.31E-03	6.77E-02	2.64E-03	1.50E-04	ND	ND	ND	ND	ND	6.66E-01	ND	0.00E+00	2.18E-04	4.55E-04	2.28E-04	-4.68E-03
POCP (“smog”) <sup>3)</sup>	kg NMVOCe/	2.35E-02	3.52E-04	9.29E-04	2.48E-02	1.09E-03	4.26E-05	ND	ND	ND	ND	ND	2.19E-01	ND	0.00E+00	8.63E-05	1.25E-04	6.82E-05	-1.39E-03
ADP-minerals & metals <sup>4)</sup>	kg Sbe/FU	2.50E-04	1.82E-07	1.12E-06	2.51E-04	6.04E-07	1.76E-08	ND	ND	ND	ND	ND	1.09E-03	ND	0.00E+00	6.11E-08	5.15E-07	1.80E-08	-4.65E-05
ADP-fossil resources	MJ/FU	7.62E+01	9.54E-01	2.79E+00	8.00E+01	3.14E+00	6.11E-02	ND	ND	ND	ND	ND	1.88E+03	ND	0.00E+00	2.61E-01	1.67E-01	9.39E-02	-4.04E+00
Water use <sup>5)</sup>	m <sup>3</sup> e priv./FU	1.70E+00	4.68E-03	7.87E-02	1.78E+00	1.55E-02	7.09E-03	ND	ND	ND	ND	ND	5.11E+01	ND	0.00E+00	1.21E-03	1.46E-02	7.26E-03	-8.23E-02

1) GWP = Global Warming Potential. 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e. 3) POCP = Photochemical ozone formation. 4) ADP = Abiotic depletion potential. 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

### ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence /FU	4.11E-07	6.52E-09	1.46E-08	4.32E-07	2.17E-08	4.38E-10	ND	ND	ND	ND	ND	1.69E-06	ND	0.00E+00	1.48E-09	1.57E-09	6.87E-10	-2.46E-08
Ionizing radiation <sup>6)</sup>	kBq U235e/FU	3.28E-01	8.25E-04	8.69E-03	3.38E-01	2.74E-03	7.41E-05	ND	ND	ND	ND	ND	5.18E+01	ND	0.00E+00	2.11E-04	7.56E-04	1.45E-04	-3.73E-02
Ecotoxicity (freshwater)	CTUe/FU	8.27E+01	1.34E-01	9.30E-01	8.38E+01	4.44E-01	1.70E-01	ND	ND	ND	ND	ND	2.86E+02	ND	0.00E+00	4.12E-02	4.36E-01	1.15E+01	-3.22E+00
Human toxicity, cancer	CTUh/FU	5.06E-09	1.09E-11	9.48E-11	5.16E-09	3.57E-11	8.17E-12	ND	ND	ND	ND	ND	2.72E-08	ND	0.00E+00	3.16E-12	2.35E-11	1.31E-11	-4.35E-10
Human tox. non-cancer	CTUh/FU	1.45E-07	6.12E-10	2.56E-09	1.49E-07	2.03E-09	3.33E-10	ND	ND	ND	ND	ND	1.41E-06	ND	0.00E+00	1.63E-10	1.06E-09	8.22E-10	-4.27E-08
SQP <sup>7)</sup>	-/FU	2.22E+01	9.47E-01	9.48E+00	3.26E+01	3.16E+00	2.99E-02	ND	ND	ND	ND	ND	4.17E+02	ND	0.00E+00	1.56E-01	2.02E-01	1.25E-01	-1.88E+00

### USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy <sup>8)</sup>	MJ/FU	6.66E+00	1.30E-02	7.62E-01	7.43E+00	4.31E-02	-1.67E+00	ND	ND	ND	ND	ND	5.15E+02	ND	0.00E+00	3.58E-03	2.12E-02	-1.26E-01	-5.65E-01
Renew. PER as material	MJ/FU	1.89E-01	0.00E+00	1.02E+00	1.21E+00	0.00E+00	-1.21E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-6.63E-04	-1.23E-03	0.00E+00
Total use of renew. PER	MJ/FU	6.84E+00	1.30E-02	1.78E+00	8.64E+00	4.31E-02	-2.88E+00	ND	ND	ND	ND	ND	5.15E+02	ND	0.00E+00	3.58E-03	2.06E-02	-1.27E-01	-5.65E-01
Non-re. PER as energy	MJ/FU	7.04E+01	9.54E-01	2.19E+00	7.36E+01	3.14E+00	5.64E-02	ND	ND	ND	ND	ND	1.88E+03	ND	0.00E+00	2.61E-01	-2.72E+00	-3.48E+00	-4.04E+00
Non-re. PER as material	MJ/FU	5.52E+00	0.00E+00	-1.29E-01	5.39E+00	0.00E+00	-1.64E-02	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	-2.60E+00	-2.78E+00	0.00E+00
Total use of non-re. PER	MJ/FU	7.60E+01	9.54E-01	2.07E+00	7.90E+01	3.14E+00	4.01E-02	ND	ND	ND	ND	ND	1.88E+03	ND	0.00E+00	2.61E-01	-5.32E+00	-6.26E+00	-4.04E+00
Secondary materials	kg/FU	3.03E-01	0.00E+00	0.00E+00	3.03E-01	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Renew. secondary fuels	MJ/FU	3.55E-03	5.09E-06	9.91E-03	1.35E-02	1.70E-05	7.62E-07	ND	ND	ND	ND	ND	2.48E-03	ND	0.00E+00	1.49E-06	7.65E-06	1.45E-06	-5.03E-05
Non-ren. secondary fuels	MJ/FU	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of net fresh water	m <sup>3</sup> /FU	3.00E-02	1.40E-04	1.79E-03	3.20E-02	4.64E-04	1.15E-04	ND	ND	ND	ND	ND	1.62E+00	ND	0.00E+00	3.46E-05	2.73E-04	-3.71E-04	-2.88E-03

8) PER = Primary energy resources.

### END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg/FU	8.85E-01	1.61E-03	1.12E-02	8.98E-01	5.32E-03	1.86E-03	ND	ND	ND	ND	ND	4.75E+00	ND	0.00E+00	4.55E-04	4.24E-03	7.30E-03	-3.98E-02
Non-hazardous waste	kg/FU	2.07E+01	2.97E-02	7.90E-01	2.15E+01	9.85E-02	1.01E-01	ND	ND	ND	ND	ND	3.67E+02	ND	0.00E+00	8.53E-03	1.15E-01	8.68E-01	-1.60E+00
Radioactive waste	kg/FU	8.18E-05	2.02E-07	2.08E-06	8.41E-05	6.70E-07	1.86E-08	ND	ND	ND	ND	ND	1.33E-02	ND	0.00E+00	5.17E-08	1.86E-07	3.59E-08	-9.17E-06

### END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling	kg	0.00E+00	0.00E+00	7.63E-03	7.63E-03	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	3.00E-01	0.00E+00	0.00E+00
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	9.05E-01	0.00E+00	0.00E+00
Exported energy – Electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	3.81E-01	0.00E+00	0.00E+00
Exported energy – Heat	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	ND	ND	ND	ND	0.00E+00	ND	0.00E+00	0.00E+00	5.24E-01	0.00E+00	0.00E+00

**ENVIRONMENTAL IMPACTS – EN 15804+A1, CML**

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO <sub>2</sub> eq./FU	5.90E+00	6.56E-02	2.21E-01	6.19E+00	2.15E-01	6.17E-03	ND	ND	ND	ND	ND	8.06E+01	ND	0.00E+00	1.85E-02	2.00E-01	1.11E-01	-3.34E-01
Ozone depletion Pot.	kg CFC-11e/FU	7.58E-08	7.76E-10	4.86E-09	8.14E-08	2.55E-09	6.91E-11	ND	ND	ND	ND	ND	1.24E-06	ND	0.00E+00	2.08E-10	1.50E-10	9.80E-11	-1.66E-09
Acidification	kg SO <sub>2</sub> e/FU	3.31E-02	1.97E-04	5.99E-04	3.39E-02	5.64E-04	2.58E-05	ND	ND	ND	ND	ND	4.04E-01	ND	0.00E+00	4.75E-05	1.12E-04	3.73E-05	-3.97E-03
Eutrophication	kg PO <sub>4</sub> <sup>3</sup> e/FU	1.01E-02	4.42E-05	3.94E-04	1.05E-02	1.37E-04	8.02E-06	ND	ND	ND	ND	ND	5.22E-02	ND	0.00E+00	1.15E-05	2.25E-05	3.17E-05	-2.61E-04
POCP (“smog”)	kg C <sub>2</sub> H <sub>4</sub> e/FU	2.94E-03	1.64E-05	6.75E-05	3.02E-03	5.02E-05	1.97E-06	ND	ND	ND	ND	ND	2.20E-02	ND	0.00E+00	4.25E-06	6.81E-06	5.17E-06	-1.85E-04
ADP-elements	kg Sbe/FU	2.48E-04	1.77E-07	1.09E-06	2.49E-04	5.89E-07	1.47E-08	ND	ND	ND	ND	ND	1.09E-03	ND	0.00E+00	5.96E-08	5.09E-07	1.55E-08	-4.64E-05
ADP-fossil	MJ/FU	7.08E+01	9.41E-01	2.65E+00	7.44E+01	3.10E+00	6.00E-02	ND	ND	ND	ND	ND	9.63E+02	ND	0.00E+00	2.57E-01	1.55E-01	9.15E-02	-3.45E+00

**ADDITIONAL INDICATOR – GWP-GHG**

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG <sup>9)</sup>	kg CO <sub>2</sub> e/FU	5.91E+00	6.60E-02	2.11E-01	6.19E+00	2.17E-01	6.22E-03	ND	ND	ND	ND	ND	8.09E+01	ND	0.00E+00	1.86E-02	2.00E-01	1.04E-01	-3.35E-01

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows - CH4 fossil, CH4 biogenic and Dinitrogen monoxide - were updated. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO2 is set to zero.

## SCENARIO DOCUMENTATION

### DATA SOURCES

#### Manufacturing energy scenario documentation – A3 (Energy data source)

1. Energy supply, electricity production, co-generation oil and gas, Heat and power co-generation, natural gas, combined cycle power plant, 400MW electrical, Spain, ecoinvent 3.10.1, 0.0249 kgCO<sub>2</sub>e/MJ
2. Energy supply, electricity production, solar photovoltaic, Electricity production, photovoltaic, 570kWp open ground installation, multi-Si, Spain, ecoinvent 3.10.1, 0.0673 kgCO<sub>2</sub>e/kWh

#### Transport scenario documentation - A4

1. Transport, freight, lorry >32 metric ton, EURO5, 2760.17 km
2. Transport, freight, sea, container ship, 0.0 km

#### Installation scenario documentation - A5 (Waste materials data source)

1. Market for corrugated board box, 1.039 kg
2. Market for printed paper, offset, 0.051 kg
3. Market for packaging film, low density polyethylene, 0.0015 kg

#### Use stages scenario documentation - B6-B7 (Energy data source)

1. Energy supply, electricity transformation and distribution, distribution low voltage, Market group for electricity, low voltage, Europe, 2850.0 kWh

### TRANSPORT SCENARIO DOCUMENTATION - A4

Scenario parameter	Value
Capacity utilization (including empty return) %	50 %
Bulk density of transported products / kg/m <sup>3</sup>	1.02E+02
Volume capacity utilization factor (factor: =1 or <1 or ≥1 for compressed or nested packaged products)	1

### INSTALLATION SCENARIO DOCUMENTATION - A5

Scenario parameter	Value
Ancillary materials for installation (specified by material) / kg or other units as appropriate	0
Water use / m <sup>3</sup>	0
Other resource use / kg	0
Direct emissions to ambient air, soil and water / kg	0

### USE STAGES SCENARIO DOCUMENTATION - B6-B7 USE OF ENERGY AND WATER

Scenario information	Value
Ancillary materials specified by material / kg or units as appropriate	Not applicable
Net fresh water consumption / m <sup>3</sup>	0
Power output of equipment / kW	28.5
Characteristic performance, e.g., energy efficiency, emissions, variation of performance with capacity utilization, etc. / Units as appropriate	For more details see product classification table and product description.
Further assumptions for scenario development, e.g., frequency and period of use, number of occupants / Units as appropriate	For more details see product classification table and product description.

### END OF LIFE SCENARIO DOCUMENTATION

Scenario information	Value
Collection process – kg collected separately	7.341
Collection process – kg collected with mixed waste	0
Recovery process – kg for re-use	0
Recovery process – kg for recycling	3.48E+00
Recovery process – kg for energy recovery	0
Disposal (total) – kg for final deposition	2.85E+00
Scenario assumptions e.g. transportation	Lorry, 16-32 metric ton, EURO5; 150 km

## THIRD-PARTY VERIFICATION STATEMENT

EPD Hub declares that this EPD is verified in accordance with ISO 14025 by an independent, third-party verifier. The project report on the Life Cycle Assessment and the report(s) on features of environmental relevance are filed at EPD Hub. EPD Hub PCR and ECO Platform verification checklist are used.

EPD Hub is not able to identify any unjustified deviations from the PCR and EN 15804+A2 in the Environmental Product Declaration and its project report.

EPD Hub maintains its independence as a third-party body; it was not involved in the execution of the LCA or in the development of the declaration and has no conflicts of interest regarding this verification.

The company-specific data and upstream and downstream data have been examined as regards plausibility and consistency. The publisher is responsible for ensuring the factual integrity and legal compliance of this declaration.



Program assistant: Xinyuan Zhang



The software used in creation of this LCA and EPD is verified by EPD Hub to conform to the procedural and methodological requirements outlined in ISO 14025:2010, ISO 14040/14044, EN 15804+A2, and EPD Hub Core Product Category Rules and General Program Instructions.

### [Verified tools](#)

Tool verifier: Hai Ha Nguyen

Tool verification validity: 28 March 2025 - 27 March 2028

# APPENDIX 1

## MATERIAL COMPOSITION

The product material composition is illustrated in the table below. The material weight is given in grams and in percentage on total product weight.

**Table 1: Material composition**

Material	Weight (g)	Weight-%
Aluminium	4686.0	63.83
Copper	8.78	0.12
Other Plastics	1856.68	25.29
Paint	162.0	2.21
PCB Alu	52.03	0.71
PCB Copper	95.92	1.31
PCB Iron	88.42	1.2
PCB Non-ferrous metal	0.02	0.0
PCB Support	347.64	4.74
PCB Tin	5.68	0.08
Stainless Steel	2.0	0.03
Steel	35.66	0.49

## APPENDIX 2

### USE PHASE (B6) VALUES FOR DIFFERENT COUNTRY MIX

In this EPD the B6 impact has been calculated using the energy mix of EU. The table in this appendix is useful for conversion and comparison of B6 values with other energy country mix. The Global Warming Potential Total (GWP tot) value is illustrated for each country. The value refers to 1 kwh.

Example on how to use the table:

If for example this EPD was done according to EU energy mix and you want to see how the GWP total changes according to a Finland country energy mix, you can take the original value in the results table here highlighted in yellow:

### ENVIRONMENTAL IMPACT DATA, RESULTS PER DECLARED UNIT

*The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.*

#### CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total <sup>1)</sup>	kg CO <sub>2</sub> e	4.44E-01	4.75E-03	2.34E-02	4.72E-01	9.50E-04	8.13E-03	ND	ND	ND	ND	ND	4.06E-02	ND	0.00E+00	5.50E-04	2.23E-03	7.33E-04	-2.82E-02

Divide that value according to the EU value from the following table (EU = 3.30E-01) and then multiplying for the Finland value from the same table (FINLAND = 1.54E-01).

Thus, the calculation of this example would be:

New B6 GWP tot for Finland =  $(4.06E-02 / 3.30E-01) \times 1.54E-01 = 1.89E-02$ .

Country	GWP tot (kg CO2 eq. per kwh)		
AFRICA	7.30E-01	GERMANY	3.90E-01
APAC	9.50E-01	INDIA	1.50E+00
AUSTRALIA	8.40E-01	ITALY	3.50E-01
AUSTRIA	2.30E-01	LATAM	3.90E-01
BELGIUM	2.00E-01	NAM	4.50E-01
CHINA	1.02E+00	NETHERLANDS	3.90E-01
DENMARK	1.60E-01	NORWAY	4.50E-02
EU	3.30E-01	ROW	7.30E-01
FINLAND	1.54E-01	SPAIN	2.10E-01
FRANCE	8.70E-02	SWEDEN	3.70E-02
		UK	2.60E-01

Source Ecoinvent 3.10.1

## APPENDIX 3 - EPD HUB ALIGNED

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management scenarios and power inputs of the luminaires within the same product family.

To calculate the Scaled Impact (*SI*), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions  $P_{in}$  and the power input of the base variant  $P_{base}$ .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system). The presented controls factors values in Table A1 are based on BS EN 15193-1:2017. Please refer to this publication or contact Signify directly for more information.

$$TSF = PSF * CSF$$

**Table 1: Light management function (PEP EcoPassport aligned)**

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Lastly, the GWP of the base variant is then scaled by the TSF.

$$\text{Scaled Impact} = \text{GWP}_{\text{case}} * \text{TSF}$$

The following list of product configurations is not exhaustive. Please use the formula defined in point 1 above to calculate the exact power scaling factor (PSF) for any specific configuration.

**Table 2: GWP per scaling factor (EPD Hub aligned)**

	12NC or Product Family Code	Description	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
							NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
1	BDP266	BDP266LED8-4S740DS50 DR	656	5.6	117.1	0.196	0.196	0.147	0.147	0.108	183.8	137.8	137.8	101.3
2	BDP266	BDP266LED10-4S740DS50 DR	820	6.8	120.6	0.239	0.239	0.179	0.179	0.131	224.1	167.8	167.8	122.8
3	BDP266	BDP266LED12-4S740DS50 DR	984	7.7	127.8	0.27	0.27	0.203	0.203	0.149	253.2	190.3	190.3	139.7
4	BDP266	BDP266LED14-4S740DS50 DR	1148	8.9	129.0	0.312	0.312	0.234	0.234	0.172	292.5	219.4	219.4	161.3
5	BDP266	BDP266LED16-4S740DS50 DR	1312	10.0	131.2	0.351	0.351	0.263	0.263	0.193	329.1	246.6	246.6	181.0
6	BDP266	BDP266LED18-4S740DS50 DR	1476	11.2	131.8	0.393	0.393	0.295	0.295	0.216	368.5	276.6	276.6	202.5
7	BDP266	BDP266LED20-4S740DS50 DR	1640	12.4	132.3	0.435	0.435	0.326	0.326	0.239	407.9	305.7	305.7	224.1
8	BDP266	BDP266LED22-4S740DS50 DR	1782	13.6	131.0	0.477	0.477	0.358	0.358	0.262	447.3	335.7	335.7	245.7
9	BDP266	BDP266LED24-4S740DS50 DR	1944	15.0	129.6	0.526	0.526	0.395	0.395	0.289	493.2	370.4	370.4	271.0
10	BDP266	BDP266LED27-4S740DS50 DR	2187	17.0	128.6	0.596	0.596	0.447	0.447	0.328	558.8	419.1	419.1	307.5

11	BDP266	BDP266LED30-4S740DS50 DR	2430	19.0	127.9	0.667	0.667	0.5	0.5	0.367	625.4	468.8	468.8	344.1
12	BDP266	BDP266LED34-4S740DS50 DR	2754	20.0	137.7	0.702	0.702	0.526	0.526	0.386	658.2	493.2	493.2	361.9
13	BDP266	BDP266LED35-4S740DS50 DR	2835	20.5	138.3	0.719	0.719	0.539	0.539	0.395	674.2	505.4	505.4	370.4
14	BDP266	BDP266LED39-4S740DS50 DR	3159	23.0	137.3	0.807	0.807	0.605	0.605	0.444	756.7	567.3	567.3	416.3
15	BDP266	BDP266LED40-4S740DS50 DR	3240	23.5	137.9	0.825	0.825	0.619	0.619	0.454	773.6	580.4	580.4	425.7
16	BDP266	BDP266LED44-4S740DS50 DR	3564	26.0	137.1	0.912	0.912	0.684	0.684	0.502	855.1	641.4	641.4	470.7
17	BDP266	BDP266LED45-4S740DS50 DR	3645	27.0	135.0	0.947	0.947	0.71	0.71	0.521	888.0	665.7	665.7	488.5
18	BDP266	BDP266LED50-4S740DS50 DR	4050	28.5	142.1	1.0	1.0	0.75	0.75	0.55	937.6	703.2	703.2	515.7
19	BDP266	BDP266LED55-4S740DS50 DR	4536	31.5	144.0	1.105	1.105	0.829	0.829	0.608	1036.1	777.3	777.3	570.1
20	BDP266	BDP266LED59-4S740DS50 DR	4860	33.5	145.1	1.175	1.175	0.881	0.881	0.646	1101.7	826.1	826.1	605.7
21	BDP266	BDP266LED64-4S740DS50 DR	5120	37.0	138.4	1.298	1.298	0.974	0.974	0.714	1217.1	913.3	913.3	669.5
22	BDP266	BDP266LED69-4S740DS50 DR	5600	40.0	140.0	1.404	1.404	1.053	1.053	0.772	1316.5	987.3	987.3	723.9
23	BDP266	BDP266LED74-4S740DS50 DR	5920	43.0	137.7	1.509	1.509	1.132	1.132	0.83	1414.9	1061.4	1061.4	778.2
24	BDP266	BDP266LED79-4S740DS50 DR	6240	44.5	140.2	1.561	1.561	1.171	1.171	0.859	1463.7	1098.0	1098.0	805.4

25	BDP266	BDP266LED84-4S740DS50 DR	6720	47.5	141.5	1.667	1.667	1.25	1.25	0.917	1563.1	1172.1	1172.1	859.8
26	BDP266	BDP266LED90-4S740DS50 DR	7200	51.0	141.2	1.789	1.789	1.342	1.342	0.984	1677.5	1258.3	1258.3	922.6
27	BDP266	BDP266LED94-4S740DS50 DR	7520	54.0	139.3	1.895	1.895	1.421	1.421	1.042	1776.8	1332.4	1332.4	977.0
28	BDP266	BDP266LED109-4S740DS50 DR	8690	63.0	137.9	2.211	2.211	1.658	1.658	1.216	2073.1	1554.6	1554.6	1140.2
29	BDP266	BDP266LED120-4S740DS50 DR	9480	71.0	133.5	2.491	2.491	1.868	1.868	1.37	2335.7	1751.5	1751.5	1284.6
30	BDP266	BDP266LED130-4S740DS50 DR	10270	77.0	133.4	2.702	2.702	2.026	2.026	1.486	2533.5	1899.7	1899.7	1393.3
31	BDP266	BDP266LED8-4S730DS50 DR	656	5.9	111.2	0.207	0.207	0.155	0.155	0.114	194.1	145.3	145.3	106.9
32	BDP266	BDP266LED10-4S730DS50 DR	820	7.1	115.5	0.249	0.249	0.187	0.187	0.137	233.5	175.3	175.3	128.5
33	BDP266	BDP266LED12-4S730DS50 DR	984	8.2	120.0	0.288	0.288	0.216	0.216	0.158	270.0	202.5	202.5	148.1
34	BDP266	BDP266LED14-4S730DS50 DR	1148	9.4	122.1	0.33	0.33	0.247	0.247	0.182	309.4	231.6	231.6	170.7
35	BDP266	BDP266LED16-4S730DS50 DR	1312	10.6	123.8	0.372	0.372	0.279	0.279	0.205	348.8	261.6	261.6	192.2
36	BDP266	BDP266LED18-4S730DS50 DR	1476	11.8	125.1	0.414	0.414	0.31	0.31	0.228	388.2	290.7	290.7	213.8
37	BDP266	BDP266LED20-4S730DS50 DR	1620	13.2	122.7	0.463	0.463	0.347	0.347	0.255	434.1	325.4	325.4	239.1
38	BDP266	BDP266LED22-4S730DS50 DR	1782	14.6	122.1	0.512	0.512	0.384	0.384	0.282	480.1	360.1	360.1	264.4

39	BDP266	BDP266LED24-4S730DS50 DR	1944	16.0	121.5	0.561	0.561	0.421	0.421	0.309	526.0	394.8	394.8	289.7
40	BDP266	BDP266LED27-4S730DS50 DR	2187	18.0	121.5	0.632	0.632	0.474	0.474	0.348	592.6	444.4	444.4	326.3
41	BDP266	BDP266LED30-4S730DS50 DR	2430	20.5	118.5	0.719	0.719	0.539	0.539	0.395	674.2	505.4	505.4	370.4
42	BDP266	BDP266LED34-4S730DS50 DR	2754	21.0	131.1	0.737	0.737	0.553	0.553	0.405	691.0	518.5	518.5	379.7
43	BDP266	BDP266LED35-4S730DS50 DR	2835	22.0	128.9	0.772	0.772	0.579	0.579	0.425	723.9	542.9	542.9	398.5
44	BDP266	BDP266LED39-4S730DS50 DR	3159	24.5	128.9	0.86	0.86	0.645	0.645	0.473	806.4	604.8	604.8	443.5
45	BDP266	BDP266LED40-4S730DS50 DR	3240	25.0	129.6	0.877	0.877	0.658	0.658	0.482	822.3	617.0	617.0	451.9
46	BDP266	BDP266LED44-4S730DS50 DR	3564	28.0	127.3	0.982	0.982	0.736	0.736	0.54	920.8	690.1	690.1	506.3
47	BDP266	BDP266LED45-4S730DS50 DR	3645	28.5	127.9	1.0	1.0	0.75	0.75	0.55	937.6	703.2	703.2	515.7
48	BDP266	BDP266LED50-4S730DS50 DR	4050	30.0	135.0	1.053	1.053	0.79	0.79	0.579	987.3	740.7	740.7	542.9
49	BDP266	BDP266LED55-4S730DS50 DR	4536	33.5	135.4	1.175	1.175	0.881	0.881	0.646	1101.7	826.1	826.1	605.7
50	BDP266	BDP266LED59-4S730DS50 DR	4860	36.0	135.0	1.263	1.263	0.947	0.947	0.695	1184.3	888.0	888.0	651.7
51	BDP266	BDP266LED64-4S730DS50 DR	5120	39.0	131.3	1.368	1.368	1.026	1.026	0.752	1282.7	962.0	962.0	705.1
52	BDP266	BDP266LED69-4S730DS50 DR	5600	42.5	131.8	1.491	1.491	1.118	1.118	0.82	1398.0	1048.3	1048.3	768.9

53	BDP266	BDP266LED74-4S730DS50 DR	5920	46.0	128.7	1.614	1.614	1.211	1.211	0.888	1513.4	1135.5	1135.5	832.6
54	BDP266	BDP266LED79-4S730DS50 DR	6400	47.5	134.7	1.667	1.667	1.25	1.25	0.917	1563.1	1172.1	1172.1	859.8
55	BDP266	BDP266LED84-4S730DS50 DR	6720	51.0	131.8	1.789	1.789	1.342	1.342	0.984	1677.5	1258.3	1258.3	922.6
56	BDP266	BDP266LED90-4S730DS50 DR	7200	55.0	130.9	1.93	1.93	1.448	1.448	1.062	1809.7	1357.7	1357.7	995.8
57	BDP266	BDP266LED94-4S730DS50 DR	7520	57.0	131.9	2.0	2.0	1.5	1.5	1.1	1875.3	1406.5	1406.5	1031.4
58	BDP266	BDP266LED109-4S730DS50 DR	8690	68.0	127.8	2.386	2.386	1.79	1.79	1.312	2237.2	1678.4	1678.4	1230.2
59	BDP266	BDP266LED120-4S730DS50 DR	9480	76.0	124.7	2.667	2.667	2.0	2.0	1.467	2500.7	1875.3	1875.3	1375.5
60	BDP266	BDP266LED8-4S727DS50 DR	656	6.5	100.9	0.228	0.228	0.171	0.171	0.125	213.8	160.3	160.3	117.2
61	BDP266	BDP266LED10-4S727DS50 DR	820	7.9	103.8	0.277	0.277	0.208	0.208	0.152	259.7	195.0	195.0	142.5
62	BDP266	BDP266LED12-4S727DS50 DR	984	9.1	108.1	0.319	0.319	0.239	0.239	0.175	299.1	224.1	224.1	164.1
63	BDP266	BDP266LED14-4S727DS50 DR	1148	10.4	110.4	0.365	0.365	0.274	0.274	0.201	342.2	256.9	256.9	188.5
64	BDP266	BDP266LED16-4S727DS50 DR	1312	11.8	111.2	0.414	0.414	0.31	0.31	0.228	388.2	290.7	290.7	213.8
65	BDP266	BDP266LED18-4S727DS50 DR	1458	13.2	110.5	0.463	0.463	0.347	0.347	0.255	434.1	325.4	325.4	239.1
66	BDP266	BDP266LED20-4S727DS50 DR	1620	14.8	109.5	0.519	0.519	0.389	0.389	0.285	486.6	364.7	364.7	267.2

67	BDP266	BDP266LED22-4S727DS50 DR	1782	16.4	108.7	0.575	0.575	0.431	0.431	0.316	539.1	404.1	404.1	296.3
68	BDP266	BDP266LED24-4S727DS50 DR	1944	18.0	108.0	0.632	0.632	0.474	0.474	0.348	592.6	444.4	444.4	326.3
69	BDP266	BDP266LED27-4S727DS50 DR	2187	20.5	106.7	0.719	0.719	0.539	0.539	0.395	674.2	505.4	505.4	370.4
70	BDP266	BDP266LED30-4S727DS50 DR	2430	21.0	115.7	0.737	0.737	0.553	0.553	0.405	691.0	518.5	518.5	379.7
71	BDP266	BDP266LED34-4S727DS50 DR	2754	24.0	114.8	0.842	0.842	0.631	0.631	0.463	789.5	591.7	591.7	434.1
72	BDP266	BDP266LED35-4S727DS50 DR	2835	24.5	115.7	0.86	0.86	0.645	0.645	0.473	806.4	604.8	604.8	443.5
73	BDP266	BDP266LED39-4S727DS50 DR	3159	27.5	114.9	0.965	0.965	0.724	0.724	0.531	904.8	678.9	678.9	497.9
74	BDP266	BDP266LED40-4S727DS50 DR	3240	28.5	113.7	1.0	1.0	0.75	0.75	0.55	937.6	703.2	703.2	515.7
75	BDP266	BDP266LED44-4S727DS50 DR	3520	31.5	111.7	1.105	1.105	0.829	0.829	0.608	1036.1	777.3	777.3	570.1
76	BDP266	BDP266LED45-4S727DS50 DR	3600	32.0	112.5	1.123	1.123	0.842	0.842	0.618	1053.0	789.5	789.5	579.5
77	BDP266	BDP266LED50-4S727DS50 DR	4050	34.0	119.1	1.193	1.193	0.895	0.895	0.656	1118.6	839.2	839.2	615.1
78	BDP266	BDP266LED55-4S727DS50 DR	4480	37.5	119.5	1.316	1.316	0.987	0.987	0.724	1233.9	925.5	925.5	678.9
79	BDP266	BDP266LED59-4S727DS50 DR	4800	40.5	118.5	1.421	1.421	1.066	1.066	0.782	1332.4	999.5	999.5	733.2
80	BDP266	BDP266LED64-4S727DS50 DR	5120	44.5	115.1	1.561	1.561	1.171	1.171	0.859	1463.7	1098.0	1098.0	805.4

81	BDP266	BDP266LED69-4S727DS50 DR	5530	48.0	115.2	1.684	1.684	1.263	1.263	0.926	1579.0	1184.3	1184.3	868.3
82	BDP266	BDP266LED74-4S727DS50 DR	5846	52.0	112.4	1.825	1.825	1.369	1.369	1.004	1711.2	1283.6	1283.6	941.4
83	BDP266	BDP266LED79-4S727DS50 DR	6400	54.0	118.5	1.895	1.895	1.421	1.421	1.042	1776.8	1332.4	1332.4	977.0
84	BDP266	BDP266LED84-4S727DS50 DR	6720	57.0	117.9	2.0	2.0	1.5	1.5	1.1	1875.3	1406.5	1406.5	1031.4
85	BDP266	BDP266LED90-4S727DS50 DR	7110	62.0	114.7	2.175	2.175	1.631	1.631	1.196	2039.4	1529.3	1529.3	1121.4
86	BDP266	BDP266LED94-4S727DS50 DR	7426	65.0	114.2	2.281	2.281	1.711	1.711	1.255	2138.8	1604.3	1604.3	1176.8
87	BDP266	BDP266LED109-4S727DS50 DR	8690	77.0	112.9	2.702	2.702	2.026	2.026	1.486	2533.5	1899.7	1899.7	1393.3
88	BDP266	BDP266LED6-4S722DS50 DR	492	5.6	87.9	0.196	0.196	0.147	0.147	0.108	183.8	137.8	137.8	101.3
89	BDP266	BDP266LED8-4S722DS50 DR	656	7.1	92.4	0.249	0.249	0.187	0.187	0.137	233.5	175.3	175.3	128.5
90	BDP266	BDP266LED10-4S722DS50 DR	810	8.8	92.0	0.309	0.309	0.232	0.232	0.17	289.7	217.5	217.5	159.4
91	BDP266	BDP266LED12-4S722DS50 DR	984	10.0	98.4	0.351	0.351	0.263	0.263	0.193	329.1	246.6	246.6	181.0
92	BDP266	BDP266LED14-4S722DS50 DR	1148	11.6	99.0	0.407	0.407	0.305	0.305	0.224	381.6	286.0	286.0	210.0
93	BDP266	BDP266LED16-4S722DS50 DR	1296	13.2	98.2	0.463	0.463	0.347	0.347	0.255	434.1	325.4	325.4	239.1
94	BDP266	BDP266LED18-4S722DS50 DR	1458	14.8	98.5	0.519	0.519	0.389	0.389	0.285	486.6	364.7	364.7	267.2

95	BDP266	BDP266LED20-4S722DS50 DR	1620	16.6	97.6	0.582	0.582	0.436	0.436	0.32	545.7	408.8	408.8	300.0
96	BDP266	BDP266LED22-4S722DS50 DR	1782	18.4	96.8	0.646	0.646	0.485	0.485	0.355	605.7	454.8	454.8	332.9
97	BDP266	BDP266LED24-4S722DS50 DR	1944	20.5	94.8	0.719	0.719	0.539	0.539	0.395	674.2	505.4	505.4	370.4
98	BDP266	BDP266LED27-4S722DS50 DR	2187	21.0	104.1	0.737	0.737	0.553	0.553	0.405	691.0	518.5	518.5	379.7
99	BDP266	BDP266LED30-4S722DS50 DR	2430	23.5	103.4	0.825	0.825	0.619	0.619	0.454	773.6	580.4	580.4	425.7
100	BDP266	BDP266LED34-4S722DS50 DR	2754	27.0	102.0	0.947	0.947	0.71	0.71	0.521	888.0	665.7	665.7	488.5

## PEP ECOPASSPORT ALIGNED

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from a reference variant of a product family, based on various light management functions, the lumen output ( $O_{lum}$ ) and reference service life ( $RSL$ ) of each product within the same product family.

To calculate the Scaled Impact ( $SI_{pep}$ ), we have followed the below methods:

1. Calculate the power scaling factor (PSF), which is the ratio of the power input of the variant in questions  $P_{in}$  and the power input of the base variant  $P_{base}$ .

$$PSF = \frac{P_{in}}{P_{base}}$$

2. Using this scaled GWP, we then can apply the PEP Ecopassport method for calculating the environmental impact of the functional unit for a luminary (1000 lumens over 35000 hours), applied to B6, where the Functional Unit application considers the lumen output ( $O_{lum}$ ) and reference service lifetime ( $RSL$ ) of the product to estimate the final environmental impact. The scaled impact ( $SI_{pep}$ ) is presented in Table A4.

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

3. Calculate the GWP scaling factor ( $PGSF$ ), by multiplying the PSF by the GSF.

$$PGSF = PSF * GSF$$

- Calculate the Total Scaling factor by multiplying the PSF by the control scaling factor (CSF), where the CSF is determined according the relevant control factor scenario (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = PGSF * CSF$$

**Table 3: Light management functions (PEP EcoPassport aligned)**

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

- Lastly, the GWP of the base variant is then scaled by the TSF.

$$Scaled\ GWP = GWP_{case} * TSF$$

**Table 4: Impact per scaling factor (PEP EcoPassport aligned)**

	12NC or Product Family Code	Description	Flux [lm]	Power [W]	Efficacy [lm/W]	PSF	Total Scaling Factor (TSF)				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
							NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
1	BDP266	BDP266LED8-4S740DS50 DR	656	5.6	117.1	0.196	0.105	0.079	0.079	0.058	98.5	74.1	74.1	54.4
2	BDP266	BDP266LED10-4S740DS50 DR	820	6.8	120.6	0.239	0.102	0.076	0.076	0.056	95.6	71.3	71.3	52.5
3	BDP266	BDP266LED12-4S740DS50 DR	984	7.7	127.8	0.27	0.096	0.072	0.072	0.053	90.0	67.5	67.5	49.7
4	BDP266	BDP266LED14-4S740DS50 DR	1148	8.9	129.0	0.312	0.095	0.071	0.071	0.052	89.1	66.6	66.6	48.8
5	BDP266	BDP266LED16-4S740DS50 DR	1312	10.0	131.2	0.351	0.094	0.071	0.071	0.052	88.1	66.6	66.6	48.8
6	BDP266	BDP266LED18-4S740DS50 DR	1476	11.2	131.8	0.393	0.093	0.07	0.07	0.051	87.2	65.6	65.6	47.8
7	BDP266	BDP266LED20-4S740DS50 DR	1640	12.4	132.3	0.435	0.093	0.07	0.07	0.051	87.2	65.6	65.6	47.8
8	BDP266	BDP266LED22-4S740DS50 DR	1782	13.6	131.0	0.477	0.093	0.07	0.07	0.051	87.2	65.6	65.6	47.8
9	BDP266	BDP266LED24-4S740DS50 DR	1944	15.0	129.6	0.526	0.095	0.071	0.071	0.052	89.1	66.6	66.6	48.8
10	BDP266	BDP266LED27-4S740DS50 DR	2187	17.0	128.6	0.596	0.095	0.071	0.071	0.052	89.1	66.6	66.6	48.8
11	BDP266	BDP266LED30-4S740DS50 DR	2430	19.0	127.9	0.667	0.096	0.072	0.072	0.053	90.0	67.5	67.5	49.7
12	BDP266	BDP266LED34-4S740DS50 DR	2754	20.0	137.7	0.702	0.089	0.067	0.067	0.049	83.5	62.8	62.8	45.9

13	BDP266	BDP266LED35-4S740DS50 DR	2835	20.5	138.3	0.719	0.088	0.066	0.066	0.048	82.5	61.9	61.9	45.0
14	BDP266	BDP266LED39-4S740DS50 DR	3159	23.0	137.3	0.807	0.09	0.068	0.068	0.05	84.4	63.8	63.8	46.9
15	BDP266	BDP266LED40-4S740DS50 DR	3240	23.5	137.9	0.825	0.089	0.067	0.067	0.049	83.5	62.8	62.8	45.9
16	BDP266	BDP266LED44-4S740DS50 DR	3564	26.0	137.1	0.912	0.089	0.067	0.067	0.049	83.5	62.8	62.8	45.9
17	BDP266	BDP266LED45-4S740DS50 DR	3645	27.0	135.0	0.947	0.091	0.068	0.068	0.05	85.3	63.8	63.8	46.9
18	BDP266	BDP266LED50-4S740DS50 DR	4050	28.5	142.1	1.0	0.086	0.065	0.065	0.047	80.6	60.9	60.9	44.1
19	BDP266	BDP266LED55-4S740DS50 DR	4536	31.5	144.0	1.105	0.085	0.064	0.064	0.047	79.7	60.0	60.0	44.1
20	BDP266	BDP266LED59-4S740DS50 DR	4860	33.5	145.1	1.175	0.085	0.064	0.064	0.047	79.7	60.0	60.0	44.1
21	BDP266	BDP266LED64-4S740DS50 DR	5120	37.0	138.4	1.298	0.088	0.066	0.066	0.048	82.5	61.9	61.9	45.0
22	BDP266	BDP266LED69-4S740DS50 DR	5600	40.0	140.0	1.404	0.087	0.065	0.065	0.048	81.6	60.9	60.9	45.0
23	BDP266	BDP266LED74-4S740DS50 DR	5920	43.0	137.7	1.509	0.089	0.067	0.067	0.049	83.5	62.8	62.8	45.9
24	BDP266	BDP266LED79-4S740DS50 DR	6240	44.5	140.2	1.561	0.087	0.065	0.065	0.048	81.6	60.9	60.9	45.0
25	BDP266	BDP266LED84-4S740DS50 DR	6720	47.5	141.5	1.667	0.087	0.065	0.065	0.048	81.6	60.9	60.9	45.0
26	BDP266	BDP266LED90-4S740DS50 DR	7200	51.0	141.2	1.789	0.088	0.066	0.066	0.048	82.5	61.9	61.9	45.0

27	BDP266	BDP266LED94-4S740DS50 DR	7520	54.0	139.3	1.895	0.089	0.067	0.067	0.049	83.5	62.8	62.8	45.9
28	BDP266	BDP266LED109-4S740DS50 DR	8690	63.0	137.9	2.211	0.088	0.066	0.066	0.048	82.5	61.9	61.9	45.0
29	BDP266	BDP266LED120-4S740DS50 DR	9480	71.0	133.5	2.491	0.092	0.069	0.069	0.051	86.3	64.7	64.7	47.8
30	BDP266	BDP266LED130-4S740DS50 DR	10270	77.0	133.4	2.702	0.092	0.069	0.069	0.051	86.3	64.7	64.7	47.8
31	BDP266	BDP266LED8-4S730DS50 DR	656	5.9	111.2	0.207	0.111	0.083	0.083	0.061	104.1	77.8	77.8	57.2
32	BDP266	BDP266LED10-4S730DS50 DR	820	7.1	115.5	0.249	0.106	0.08	0.08	0.058	99.4	75.0	75.0	54.4
33	BDP266	BDP266LED12-4S730DS50 DR	984	8.2	120.0	0.288	0.103	0.077	0.077	0.057	96.6	72.2	72.2	53.4
34	BDP266	BDP266LED14-4S730DS50 DR	1148	9.4	122.1	0.33	0.101	0.076	0.076	0.056	94.7	71.3	71.3	52.5
35	BDP266	BDP266LED16-4S730DS50 DR	1312	10.6	123.8	0.372	0.099	0.074	0.074	0.054	92.8	69.4	69.4	50.6
36	BDP266	BDP266LED18-4S730DS50 DR	1476	11.8	125.1	0.414	0.098	0.074	0.074	0.054	91.9	69.4	69.4	50.6
37	BDP266	BDP266LED20-4S730DS50 DR	1620	13.2	122.7	0.463	0.1	0.075	0.075	0.055	93.8	70.3	70.3	51.6
38	BDP266	BDP266LED22-4S730DS50 DR	1782	14.6	122.1	0.512	0.1	0.075	0.075	0.055	93.8	70.3	70.3	51.6
39	BDP266	BDP266LED24-4S730DS50 DR	1944	16.0	121.5	0.561	0.101	0.076	0.076	0.056	94.7	71.3	71.3	52.5
40	BDP266	BDP266LED27-4S730DS50 DR	2187	18.0	121.5	0.632	0.101	0.076	0.076	0.056	94.7	71.3	71.3	52.5

41	BDP266	BDP266LED30-4S730DS50 DR	2430	20.5	118.5	0.719	0.104	0.078	0.078	0.057	97.5	73.1	73.1	53.4
42	BDP266	BDP266LED34-4S730DS50 DR	2754	21.0	131.1	0.737	0.094	0.071	0.071	0.052	88.1	66.6	66.6	48.8
43	BDP266	BDP266LED35-4S730DS50 DR	2835	22.0	128.9	0.772	0.095	0.071	0.071	0.052	89.1	66.6	66.6	48.8
44	BDP266	BDP266LED39-4S730DS50 DR	3159	24.5	128.9	0.86	0.095	0.071	0.071	0.052	89.1	66.6	66.6	48.8
45	BDP266	BDP266LED40-4S730DS50 DR	3240	25.0	129.6	0.877	0.095	0.071	0.071	0.052	89.1	66.6	66.6	48.8
46	BDP266	BDP266LED44-4S730DS50 DR	3564	28.0	127.3	0.982	0.096	0.072	0.072	0.053	90.0	67.5	67.5	49.7
47	BDP266	BDP266LED45-4S730DS50 DR	3645	28.5	127.9	1.0	0.096	0.072	0.072	0.053	90.0	67.5	67.5	49.7
48	BDP266	BDP266LED50-4S730DS50 DR	4050	30.0	135.0	1.053	0.091	0.068	0.068	0.05	85.3	63.8	63.8	46.9
49	BDP266	BDP266LED55-4S730DS50 DR	4536	33.5	135.4	1.175	0.09	0.068	0.068	0.05	84.4	63.8	63.8	46.9
50	BDP266	BDP266LED59-4S730DS50 DR	4860	36.0	135.0	1.263	0.091	0.068	0.068	0.05	85.3	63.8	63.8	46.9
51	BDP266	BDP266LED64-4S730DS50 DR	5120	39.0	131.3	1.368	0.093	0.07	0.07	0.051	87.2	65.6	65.6	47.8
52	BDP266	BDP266LED69-4S730DS50 DR	5600	42.5	131.8	1.491	0.092	0.069	0.069	0.051	86.3	64.7	64.7	47.8
53	BDP266	BDP266LED74-4S730DS50 DR	5920	46.0	128.7	1.614	0.095	0.071	0.071	0.052	89.1	66.6	66.6	48.8
54	BDP266	BDP266LED79-4S730DS50 DR	6400	47.5	134.7	1.667	0.092	0.069	0.069	0.051	86.3	64.7	64.7	47.8

55	BDP266	BDP266LED84-4S730DS50 DR	6720	51.0	131.8	1.789	0.093	0.07	0.07	0.051	87.2	65.6	65.6	47.8
56	BDP266	BDP266LED90-4S730DS50 DR	7200	55.0	130.9	1.93	0.095	0.071	0.071	0.052	89.1	66.6	66.6	48.8
57	BDP266	BDP266LED94-4S730DS50 DR	7520	57.0	131.9	2.0	0.094	0.071	0.071	0.052	88.1	66.6	66.6	48.8
58	BDP266	BDP266LED109-4S730DS50 DR	8690	68.0	127.8	2.386	0.095	0.071	0.071	0.052	89.1	66.6	66.6	48.8
59	BDP266	BDP266LED120-4S730DS50 DR	9480	76.0	124.7	2.667	0.099	0.074	0.074	0.054	92.8	69.4	69.4	50.6
60	BDP266	BDP266LED8-4S727DS50 DR	656	6.5	100.9	0.228	0.122	0.091	0.091	0.067	114.4	85.3	85.3	62.8
61	BDP266	BDP266LED10-4S727DS50 DR	820	7.9	103.8	0.277	0.118	0.088	0.088	0.065	110.6	82.5	82.5	60.9
62	BDP266	BDP266LED12-4S727DS50 DR	984	9.1	108.1	0.319	0.114	0.086	0.086	0.063	106.9	80.6	80.6	59.1
63	BDP266	BDP266LED14-4S727DS50 DR	1148	10.4	110.4	0.365	0.111	0.083	0.083	0.061	104.1	77.8	77.8	57.2
64	BDP266	BDP266LED16-4S727DS50 DR	1312	11.8	111.2	0.414	0.111	0.083	0.083	0.061	104.1	77.8	77.8	57.2
65	BDP266	BDP266LED18-4S727DS50 DR	1458	13.2	110.5	0.463	0.111	0.083	0.083	0.061	104.1	77.8	77.8	57.2
66	BDP266	BDP266LED20-4S727DS50 DR	1620	14.8	109.5	0.519	0.112	0.084	0.084	0.062	105.0	78.8	78.8	58.1
67	BDP266	BDP266LED22-4S727DS50 DR	1782	16.4	108.7	0.575	0.113	0.085	0.085	0.062	106.0	79.7	79.7	58.1
68	BDP266	BDP266LED24-4S727DS50 DR	1944	18.0	108.0	0.632	0.114	0.086	0.086	0.063	106.9	80.6	80.6	59.1

69	BDP266	BDP266LED27-4S727DS50 DR	2187	20.5	106.7	0.719	0.115	0.086	0.086	0.063	107.8	80.6	80.6	59.1
70	BDP266	BDP266LED30-4S727DS50 DR	2430	21.0	115.7	0.737	0.106	0.08	0.08	0.058	99.4	75.0	75.0	54.4
71	BDP266	BDP266LED34-4S727DS50 DR	2754	24.0	114.8	0.842	0.107	0.08	0.08	0.059	100.3	75.0	75.0	55.3
72	BDP266	BDP266LED35-4S727DS50 DR	2835	24.5	115.7	0.86	0.106	0.08	0.08	0.058	99.4	75.0	75.0	54.4
73	BDP266	BDP266LED39-4S727DS50 DR	3159	27.5	114.9	0.965	0.107	0.08	0.08	0.059	100.3	75.0	75.0	55.3
74	BDP266	BDP266LED40-4S727DS50 DR	3240	28.5	113.7	1.0	0.108	0.081	0.081	0.059	101.3	75.9	75.9	55.3
75	BDP266	BDP266LED44-4S727DS50 DR	3520	31.5	111.7	1.105	0.109	0.082	0.082	0.06	102.2	76.9	76.9	56.3
76	BDP266	BDP266LED45-4S727DS50 DR	3600	32.0	112.5	1.123	0.109	0.082	0.082	0.06	102.2	76.9	76.9	56.3
77	BDP266	BDP266LED50-4S727DS50 DR	4050	34.0	119.1	1.193	0.103	0.077	0.077	0.057	96.6	72.2	72.2	53.4
78	BDP266	BDP266LED55-4S727DS50 DR	4480	37.5	119.5	1.316	0.103	0.077	0.077	0.057	96.6	72.2	72.2	53.4
79	BDP266	BDP266LED59-4S727DS50 DR	4800	40.5	118.5	1.421	0.104	0.078	0.078	0.057	97.5	73.1	73.1	53.4
80	BDP266	BDP266LED64-4S727DS50 DR	5120	44.5	115.1	1.561	0.106	0.08	0.08	0.058	99.4	75.0	75.0	54.4
81	BDP266	BDP266LED69-4S727DS50 DR	5530	48.0	115.2	1.684	0.106	0.08	0.08	0.058	99.4	75.0	75.0	54.4
82	BDP266	BDP266LED74-4S727DS50 DR	5846	52.0	112.4	1.825	0.11	0.083	0.083	0.061	103.1	77.8	77.8	57.2

83	BDP266	BDP266LED79-4S727DS50 DR	6400	54.0	118.5	1.895	0.104	0.078	0.078	0.057	97.5	73.1	73.1	53.4
84	BDP266	BDP266LED84-4S727DS50 DR	6720	57.0	117.9	2.0	0.104	0.078	0.078	0.057	97.5	73.1	73.1	53.4
85	BDP266	BDP266LED90-4S727DS50 DR	7110	62.0	114.7	2.175	0.107	0.08	0.08	0.059	100.3	75.0	75.0	55.3
86	BDP266	BDP266LED94-4S727DS50 DR	7426	65.0	114.2	2.281	0.107	0.08	0.08	0.059	100.3	75.0	75.0	55.3
87	BDP266	BDP266LED109-4S727DS50 DR	8690	77.0	112.9	2.702	0.108	0.081	0.081	0.059	101.3	75.9	75.9	55.3
88	BDP266	BDP266LED6-4S722DS50 DR	492	5.6	87.9	0.196	0.139	0.104	0.104	0.076	130.3	97.5	97.5	71.3
89	BDP266	BDP266LED8-4S722DS50 DR	656	7.1	92.4	0.249	0.133	0.1	0.1	0.073	124.7	93.8	93.8	68.4
90	BDP266	BDP266LED10-4S722DS50 DR	810	8.8	92.0	0.309	0.133	0.1	0.1	0.073	124.7	93.8	93.8	68.4
91	BDP266	BDP266LED12-4S722DS50 DR	984	10.0	98.4	0.351	0.125	0.094	0.094	0.069	117.2	88.1	88.1	64.7
92	BDP266	BDP266LED14-4S722DS50 DR	1148	11.6	99.0	0.407	0.124	0.093	0.093	0.068	116.3	87.2	87.2	63.8
93	BDP266	BDP266LED16-4S722DS50 DR	1296	13.2	98.2	0.463	0.125	0.094	0.094	0.069	117.2	88.1	88.1	64.7
94	BDP266	BDP266LED18-4S722DS50 DR	1458	14.8	98.5	0.519	0.125	0.094	0.094	0.069	117.2	88.1	88.1	64.7
95	BDP266	BDP266LED20-4S722DS50 DR	1620	16.6	97.6	0.582	0.126	0.095	0.095	0.069	118.1	89.1	89.1	64.7
96	BDP266	BDP266LED22-4S722DS50 DR	1782	18.4	96.8	0.646	0.127	0.095	0.095	0.07	119.1	89.1	89.1	65.6

97	BDP266	BDP266LED24-4S722DS50 DR	1944	20.5	94.8	0.719	0.129	0.097	0.097	0.071	121.0	91.0	91.0	66.6
98	BDP266	BDP266LED27-4S722DS50 DR	2187	21.0	104.1	0.737	0.118	0.088	0.088	0.065	110.6	82.5	82.5	60.9
99	BDP266	BDP266LED30-4S722DS50 DR	2430	23.5	103.4	0.825	0.119	0.089	0.089	0.065	111.6	83.5	83.5	60.9
100	BDP266	BDP266LED34-4S722DS50 DR	2754	27.0	102.0	0.947	0.12	0.09	0.09	0.066	112.5	84.4	84.4	61.9