



Product Description

Compact quartz metal halide lamps with double-pinch

Benefits

- Allows compact and very efficient luminaire systems with high precision optics for good beam control and minimal spill light
- Very good colour rendering creates a pleasant ambience with high visual comfort for players and spectators
- Continuous spectral distribution offers a superior solution for (semi-) professional stadiums with regular TV coverage

Applications

- Professional sports lighting and floodlighting

Features

- Very compact source (Short Arc) with high luminous efficacy and superior colour rendering
- Double-pinch concept results in long lifetime

Versions




LPPR MHN-SA X830R



LPPR MHN-SA 0001

- Natural white colour appearance, high colour rendering and good colour stability
- Daylight colour temperature eases transition from daylight to artificial lighting
- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

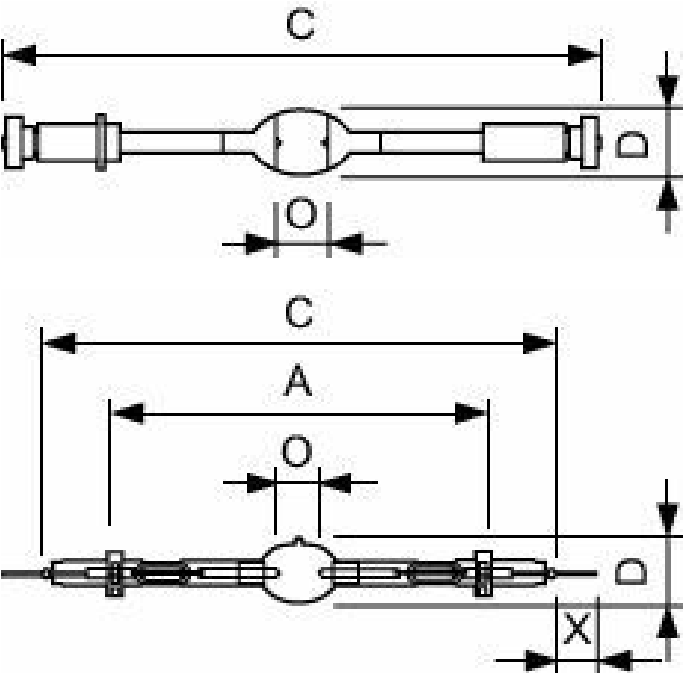

Product	D (max)	O	C (max)
MASTER MHN-SA 1800W/956 (P)SFC 230V	41 mm	25 mm	364 mm
MASTER MHN-SA 1800W/956 (P)SFC 400V	41 mm	25 mm	364 mm

Product	D (max)	O	X	A	C (max)
MASTER MHN-SA 1800W/956 230V XW UNP/1	41 mm	25 mm	25 mm	318 mm	369 mm
MASTER MHN-SA 2000W/956 400V XW HO UNP/1	41 mm	25 mm	34 mm	226 mm	369 mm

General Information

Operating PositionP15 [Parallel +/-15D or Horizontal(HOR)]

Light Technical

Color DesignationDaylight
Chromaticity Coordinate X (Nom)330
Correlated Color Temperature (Nom)5600 K

Controls and Dimming

DimmableNo

Mechanical and Housing

Bulb FinishClear
Bulb ShapeTD40

General Information

Order Code	Full Product Name	Cap-Base
20106500	MASTER MHN-SA 1800W/956 230V XW UNP/1	X830R
24183600	MASTER MHN-SA 2000W/956 400V XW HO UNP/1	X830R
20075400	MASTER MHN-SA 1800W/956 (P)SFC 230V	(P)SFC
20076100	MASTER MHN-SA 1800W/956 (P)SFC 400V	(P)SFC

Light Technical

Order Code	Full Product Name	Chromaticity Coordinate Y (Nom)	Luminous Efficacy (rated) (Nom)	Color rendering index (CRI)
20106500	MASTER MHN-SA 1800W/956 230V XW UNP/1	339	86 lm/W	86
24183600	MASTER MHN-SA 2000W/956 400V XW HO UNP/1	366	108 lm/W	81
20075400	MASTER MHN-SA 1800W/956 (P)SFC 230V	339	83 lm/W	86
20076100	MASTER MHN-SA 1800W/956 (P)SFC 400V	339	84 lm/W	86

Operating and Electrical

Order Code	Full Product Name	Power Consumption	Voltage (Nom)
20106500	MASTER MHN-SA 1800W/956 230V XW UNP/1	1,800.0 W	120 V
24183600	MASTER MHN-SA 2000W/956 400V XW HO UNP/1	2,100 W	205 V
20075400	MASTER MHN-SA 1800W/956 (P)SFC 230V	1,800.0 W	120 V
20076100	MASTER MHN-SA 1800W/956 (P)SFC 400V	1,900 W	205 V

Approval and Application

Order Code	Full Product Name	Mercury (Hg) Content (Nom)	Energy Consumption kWh/1000 h
20106500	MASTER MHN-SA 1800W/956 230V XW UNP/1	87 mg	1,980 kWh
24183600	MASTER MHN-SA 2000W/956 400V XW HO UNP/1	215 mg	2,305 kWh
20075400	MASTER MHN-SA 1800W/956 (P)SFC 230V	87 mg	1,980 kWh
20076100	MASTER MHN-SA 1800W/956 (P)SFC 400V	234 mg	2,035 kWh