

PHILIPS

Xitanium

LED driver



Datasheet

Xitanium LED Xtreme drivers – Sensor Ready

Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt

9290 028 59606

Simplifying connectivity solutions with sensors and controls

Philips LED Xtreme Sensor Ready drivers are ideal for use with sensors applied in outdoor and industrial management systems. With its dual integrated power supplies it is easy to power sensors and wireless modules directly from the driver. The driver also features integrated energy metering related to these management systems from the SR Certified partner program. This program with key management and sensor vendors ensures that certified sensors and controllers work seamlessly with the Xitanium SR driver.

Features

- Integrated Bus Power Supply for sensors and radios (DALI part 250)
- Integrated 24VDC auxiliary power supply (DALI Part 150)
- Memory Bank 1 Extension / Luminaire Data (DALI part 251)
- Highly accurate energy reporting (DALI Part 252)
- Diagnostics & Maintenance data (DALI part 253)
- SimpleSet[®], wireless configuration interface
- High surge immunity (CM/DM)
- Long lifetime and robust protection
- Configurable operating windows (AOC)
- Autonomous dimming via Integrated DynaDimmer
- Suitable for central emergency DC operation (DCemDim)
- Thermal protection for driver (DTL) and LED module (MTP)
- Constant Light Output (CLO)
- Adjustable Start-up Time (AST)
- Adjustable Light Output (ALO)
- End-Of-Life indicator (EOL)
- OEM Write Protection (OWP)

Benefits

- Sensor Ready concept, ideal for use with sensors applied in outdoor and industrial management systems
- Dual integrated power supplies to power sensors and wireless radios directly from the driver, open spec for all OEMs, simplifying integration of sensors into the luminaire
- Low inrush current due to IntelliStart, a driver-integrated feature enabling a high amount of drivers per MCB (on select models)
- High-accuracy integrated power metering
- Certified per DIIA intra-luminaire standard D4i

Application

- Road and street lighting
- Residential lighting
- Area lighting
- Industrial lighting
- Tunnel lighting

Logistical data

Specification item	Value
Product name	Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt
EOC	871951430284600
Logistic code 12NC	9290 028 59606
EAN1 (GTIN)	8719514302846
EAN3 (box)	8719514302853
Pieces per box	12
Weight	760 gram

Electrical input data

Specification item	Value	Unit	Condition
Rated input voltage range	202...254	V _{ac}	Performance range
Rated input voltage	230	V _{ac}	
Rated input frequency	47...63	Hz	Performance range
Rated input current	0.57	A	@ rated output power @ rated input voltage
Max. input current	0.61	A	@ rated output power @ minimum performance input voltage
Rated input power	123.0	W	@ rated output + Vaux power @ rated input voltage
Power factor performance range	≥ 0.99		@ rated output power @ rated input voltage
Total harmonic distortion	20	%	@ rated output power @ rated input voltage
Total harmonic distortion, best value	3	%	@ rated output power @ rated input voltage
Efficiency	92.0	%	@ rated output power @ rated input voltage @ max. Uout
Rated input voltage DC	186...250	V _{dc}	Performance range
Rated input current DC	0.3...0.43	A _{dc}	Performance range
Input voltage AC	90...264	V _{ac}	Safety operational range, see MainsGuard graph
Input frequency AC	45...66	Hz	Safety operational range
Input voltage DC	168...275	V _{dc}	Safety operational range
Standby Power (no load)	0.35	W	Excl. consumption by sensors connected to the DA bus and/or 24VDC auxiliary supply
Isolation input to output	Reinforced		

Electrical output data


Specification item	Value	Unit	Condition
Regulation method	Constant Current		
Output voltage	50...220	V _{dc}	
Output voltage max.	270	V	Maximum voltage at open load
Output current	200...1050	mA	
Output current min programmable	200	mA	
Min output current	53	mA	
Output current tolerance ±	5	%	@full load
Output current ripple LF	≤ 4	%	Ripple = peak / average, < 3kHz
Output current ripple HF	≤ 4	%	
Output P _{st} ^{LM}	≤ 0.6		In entire operating window
Output SVM	≤ 0.6		In entire operating window
Output power	8.0...110.0	W	
Minimum performance output power	32	W	Power factor > 0.9 and THD < 20%

Control interfaces

Specification item	Value	Unit	Condition
Control method	Dynadimmer, SR		Acc. D4i. See www.digitalilluminationinterface.org/products . Please refer to design-in guide at www.philips.com/oem for more controllability details.
Dimming range	10...100	%	Output current amplitude dimming.
Isolation controls input to output	Basic		acc. IEC61347-1
SR Power Supply max voltage.	22.5	V	
SR output current	52	mA	
SR Power Supply max current source	60	mA	
Supported DALI parts	250, 251, 252, 253		Check website: https://www.dali-alliance.org/dali/standards.html for details.

Wiring and Connections

Specification item	Value	Unit	Type
Input wire cross-section	0.5...1.5 / 20...16	mm ² / AWG	solid / stranded wire
Input wire strip length	8.5...9.5	mm	
Output wire cross-section	0.5...1.5 / 20...16	mm ² / AWG	solid / stranded wire
Output wire strip length	8.5...9.5	mm	
Control wire cross-section	0.5...1.5 / 20...16	mm ² / AWG	solid / stranded wire
Control wire strip length	8.5...9.5	mm	
Maximum cable length	1.5	m	CISPR15: between driver and LED module
Maximum NTC output cable length	0.6	m	

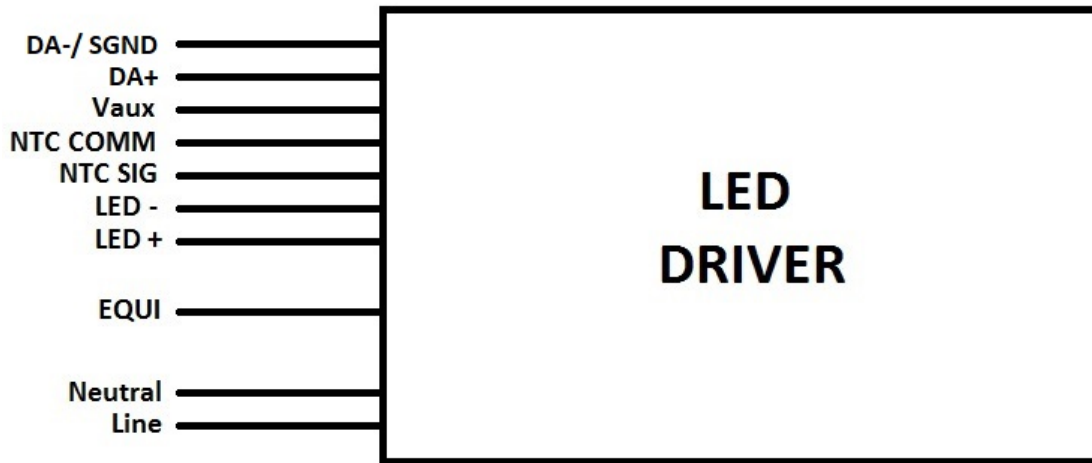


Isolation

Insulation per IEC61347-1	Mains	EQUI	LED + NTC	DA + AUX
Mains	-	Reinforced	Reinforced	Reinforced
EQUI	Reinforced	-	Basic	Basic
LED + NTC	Reinforced	Basic	-	Basic
DA + AUX	Reinforced	Basic	Basic	-

Dimensions and weight

Specification item	Value	Unit	Tolerance (mm)
Length (A1)	150	mm	
Mounting hole distance (A2)	133.6	mm	
Width (B1)	90	mm	
Width (B2)	70	mm	
Height (C1)	40	mm	
Mounting hole diameter (D1)	4.5	mm	
Weight	760	gram	

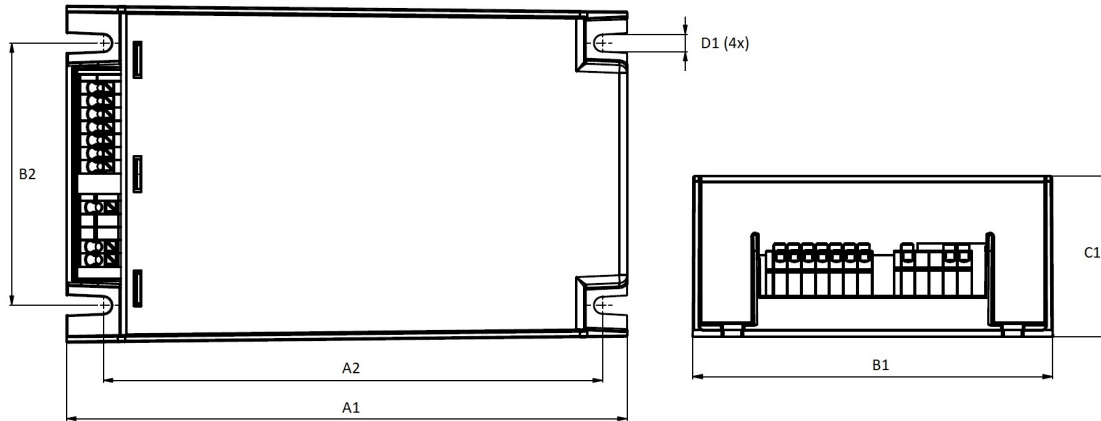


Operational temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-40...+55	°C	Higher ambient temperature allowed as long as T _{case-max} is not exceeded
T _{case-max}	90	°C	Maximum temperature measured at T _{case-point}
T _{case-life}	80	°C	Measured at T _{case-point}
Maximum housing temperature	120	°C	In case of a failure, inherent by design
Relative humidity	10...90	%	Non-condensing

Lifetime

Specification item	Value	Unit	Condition
Driver lifetime	100,000	hours	Measured temperature at T _{case-point} is T _{case-life} . Maximum failures = 10%

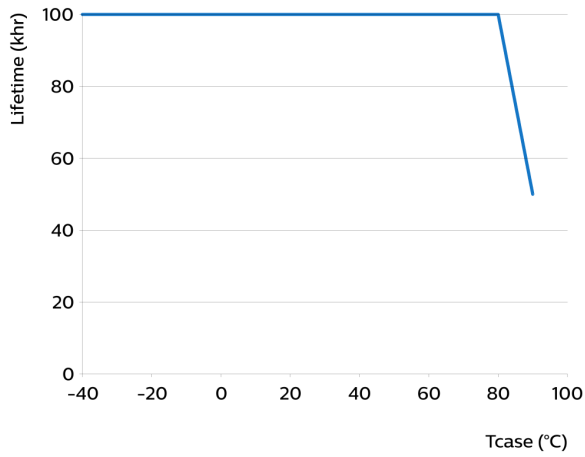

Maximum failures = 10%

Temperature [°C]	Lifetime	Unit	Condition
90	50000	hr	
85	71000	hr	
80	100000	hr	Temperature measured @Tc point
75	>100000	hr	
70	>100000	hr	

Storage temperature and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-40...+85	°C	
Relative humidity	5...95	%	Non-condensing

Programmable features

Specification item	Available	Default setting	Condition
Set Adjustable Output Current (AOC)	Programmable, SimpleSet	700 mA	
LED Module Temperature Protection (MTP)	Yes	OFF	
Driver Temperature Limit (DTL)	Yes	ON	
Adjustable Light Output (ALO)	Yes	OFF	
Adjustable Light Output (ALO) min level	Yes	OFF	
Constant Light Output (CLO)	Yes	OFF	
Adjustable Start-up Time (AST)	Yes	1 s	
Integrated Dynadimmer	Yes	OFF	5-step, light turn-off possible
Min Dim Level	Yes	10 %	
DC emergency (DCemDim)	Yes	ON	Sensor commands accepted, EOF(x) range: 10 ... 60%. No external DC rated mains fuse required. Internal fuse rating: T5A 250VAC/DC.
DALI control supported at DC operation	Yes	OFF	
End Of Life indicator (EOL)	Yes	OFF	
OEM Write Protection (OWP)	Yes	OFF	
DALI Power Supply (DALI part 250)	Yes	ON	
Luminaire Info (DALI part 251)	Yes		
Luminaire maintenance (DALI part 253)	Yes		

Non-programmable features


Specification item	Value	Condition
Open load protection	Yes	Automatic recovering
Short circuit protection	Yes	Automatic recovering
Over power protection	Yes	Automatic recovering
Hot wiring	No	
Suitable for fixtures with protection class	I and II	per IEC60598
Overtemperature protection	Yes	Automatic recovering
+24V Auxiliary Power Supply (DALI part 150)	Yes	
Inrush Limiter type	IntelliStart	
Energy metering (DALI part 252)	Yes	Accuracy 0.5W at standby, +/-1 % at full power
Diagnostics (DALI part 253)	Yes	
Diagnostics via Signify tool	Yes	

Inrush current

Specification item	Value	Unit	Condition
Inrush current	49	A	Input voltage 230V
Subsequent inrush current	4	A	Input voltage 230V
Inrush peak width	290	µs	Input voltage 230 V, measured at 50% height
Inrush current subsequent peak width	2700	µs	Input voltage 230 V, measured at 50% height
Drivers / MCB 16A type B / Fuse 16A	29	pcs	Based on rated full output power

Please refer to the driver design in guide if you use other MCB-types.

If several mini circuit breakers are used directly side-by-side (without distance pieces) a correction factor of 80% has to be applied to the rated current

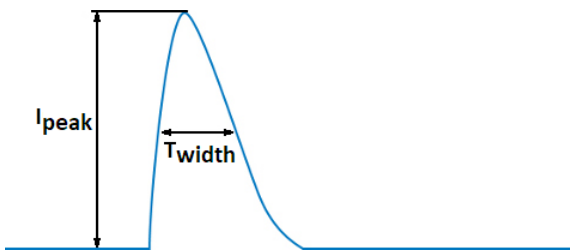

Driver touch current / protective conductor current / earth leakage current

Specification item	Value	Unit	Condition
Typical Touch Current (ins. Class II)	0.35	mA peak	Acc. IEC61347-1. LED module contribution not included
Typical Protective Conductor Current (ins. Class I)	0.25	mA rms	Acc. IEC60598-1. LED module contribution not included

Surge immunity


Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	6	kV	L-N acc. IEC61000-4-5. 2 Ohm, 1.2/50us, 8/20us
Mains surge immunity (comm. mode)	10	kV	L/N - EQUI 10kV acc. EN61547; 8kV acc. IEC61000-4-5, 12 Ohm 1.2/50us,8/20us
Control surge immunity (diff. mode)	0.03	kV	DA - DA, DA - AUX acc. IEC61000-4-5. 2 Ohm, 1.2/50us, 8/20us
Control surge immunity (comm. mode)	4	kV	DA/AUX - EQUI acc. IEC61000-4-5. 12 Ohm 1.2/50us,8/20us
Control surge immunity (comm. mode)	4	kV	DA/AUX - L/N acc. IEC61000-4-5. 12 Ohm 1.2/50us,8/20us

Application Info (Approbation)

Specification item	Value
Approval marks and Certifications	CCC / CE / D4i / Double-insulated Built-In / EAC / EL / ENEC / RCM / SR / UKCA / WEEE
Ingress Protection classification (IP)	20
Application	Outdoor
Mounting Type	Built-in


Graphs

Operating window

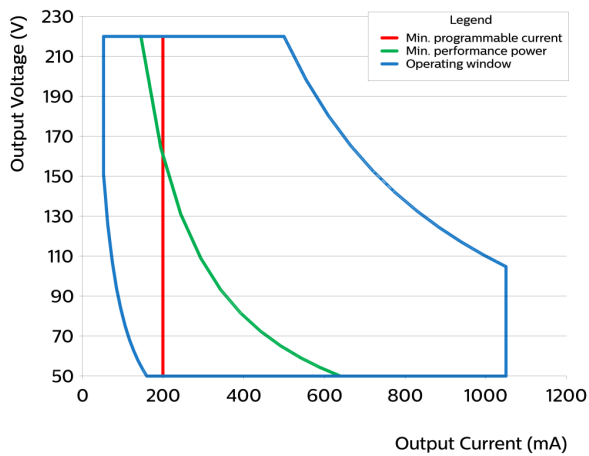


Type	Output current (mA)	Min. output voltage (V)	Max. output voltage (V)	Max. output power (W)
Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt	200	50	220	44
Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt	250	50	220	55
Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt	300	50	220	66
Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt	350	50	220	77
Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt	400	50	220	88
Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt	450	50	220	99
Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt	500	50	220	110
Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt	550	50	200	110
Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt	600	50	183	110
Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt	650	50	169	110
Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt	700	50	157	110
Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt	750	50	146	110
Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt	800	50	137	110
Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt	850	50	129	110
Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt	900	50	122	110
Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt	950	50	115	110
Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt	1000	50	110	110
Xi SR 110W 0.2-1.0A SNEMP 230V C150 sXt	1050	50	104	110


Thermal Guard

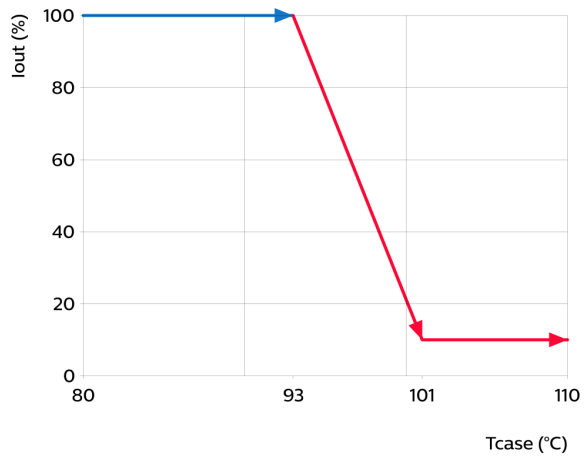


Mains Guard

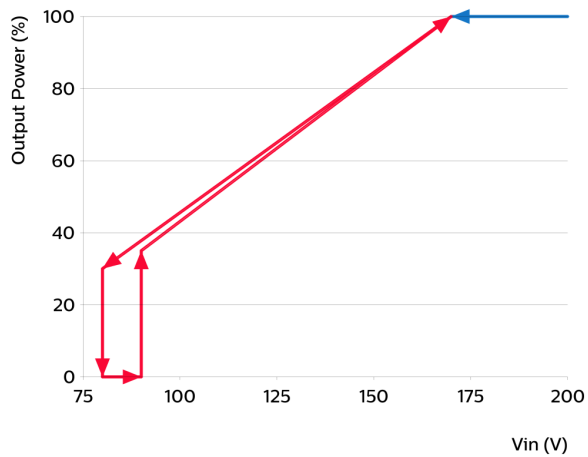


Power factor versus output power

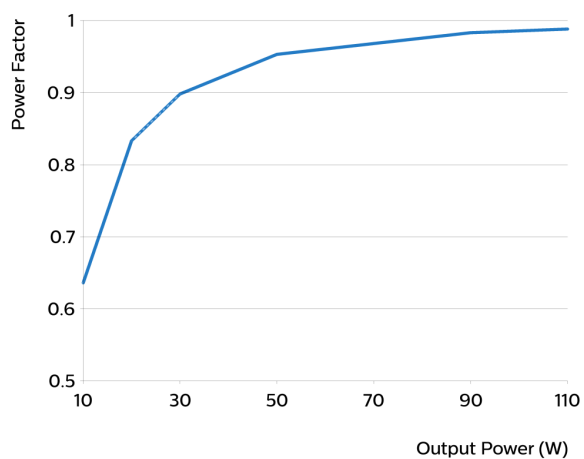

Efficiency versus output power

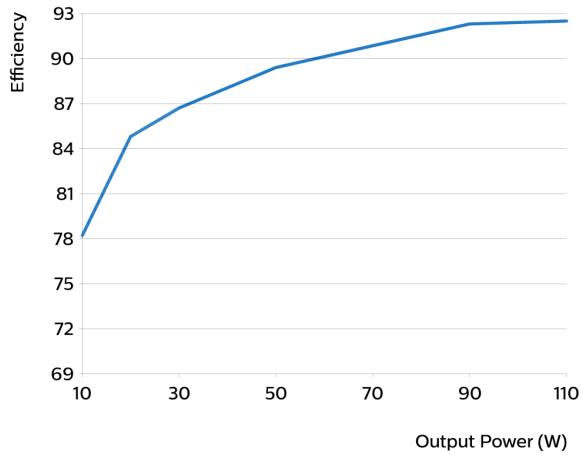

THD versus output power

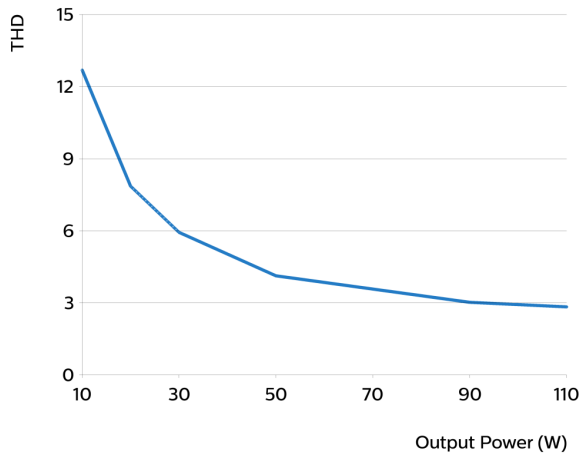

Notes

Important info about dual power supplies:

1: DA power supply and auxiliary supply are short-circuit proof.

2: The DA supply is specified with a guaranteed supply current of 52mA and a maximum supply current of 60mA. Voltage is depending on loading and will vary between 12 and 20VDC. The DA supply is turned on by factory default and can be switched off through MultiOne software.

3: Auxiliary supply delivers 24VDC and is able to deliver 3W average power. Peak power capacity is 6W with 25% duty cycle (T=5.2ms). This supply cannot be switched off.

4: DA and auxiliary supplies share the same common negative terminal DA-.

5: Parallel connection of multiple auxiliary supplies is not supported.

Inrush current & fusing:

1: Driver inrush current is limited by randomly switching on at mains voltage zero crossing (IntelliStart).

2: Max. number of drivers per MCB/melting fuse is based on aggregate steady-state input current.



©2024 Signify Holding, IBRS 10461, 5600 VB, NL. All rights reserved.
UK importer address: Signify Commercial UK Limited, 3, Guildford Business Park, GU2 8XG.

The information provided herein is subject to change without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

Date of release: November 4, 2024 v1

www.philips.com/oem